

EMC TEST REPORT

For

Ningbo Hangzhou Bay New Zone Zhuoao Light Technology Co., Ltd.

LED Bulb Light

Model No.: See Anne × 1

Prepared for : Ningbo Hangzhou Bay New Zone Zhuoao Light Technology Co., Ltd.
Address : No.758, Wei'er Road, Industrial Zone, Andong Town, Cixi City, Ningbo, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Jayden Zhuo, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : April 13, 2015
Number of tested samples : 1
Serial number : Prototype
Date of Test : April 13, 2015 - April 20, 2015
Date of Report : April 20, 2015



EMC TEST REPORT**EN 55015: 2013**

Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

EN 61547: 2009

Equipment for general lighting purposes - EMC immunity requirements

Report Reference No.: **LCS1504130539E**

Date Of Issue: April 20, 2015

Testing Laboratory Name.....: **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address: 1/F., Xingyuan Industrial Jayden Zhuo, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure: Full application of Harmonised standards
Partial application of Harmonised standards
Other standard testing method **Applicant's Name**: **Ningbo Hangzhou Bay New Zone Zhuoao Light Technology Co., Ltd.**

Address: No.758, Wei'er Road, Industrial Zone, Andong Town, Cixi City, Ningbo, China

Test Specification:Standard: EN 55015: 2013
EN 61000-3-2: 2006+A1: 2009+A2: 2009
EN 61000-3-3: 2013
EN 61547: 2009

Test Report Form No.: LCSEMC-1.0

TRF Originator: Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF: Dated 2011-03

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. is acknowledged as copyright owner and source of the material. SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description.....: **LED Bulb Light**


Trade Mark: N/A

Model/ Type Reference: ZG120-18W-01


Ratings: AC 180-240V, 50-60Hz, 18W

Result: **Positive****Compiled by:**

Elan Liu/ File administrators

Supervised by:

Danny Huang/ Technique principal

Approved by:

Gavin Liang/ Manager

EMC -- TEST REPORT

Test Report No. : LCS1504130539E

April 20, 2015

Date of issue

Type/Model.....	: ZG120-18W-01
EUT.....	: LED Bulb Light
Applicant.....	: Ningbo Hangzhou Bay New Zone Zhuoao Light Technology Co., Ltd.
Address.....	: No.758, Wei'er Road, Industrial Zone, Andong Town, Cixi City, Ningbo, China
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: Ningbo Hangzhou Bay New Zone Zhuoao Light Technology Co., Ltd.
Address.....	: No.758, Wei'er Road, Industrial Zone, Andong Town, Cixi City, Ningbo, China
Telephone.....	:
Fax.....	:
Factory.....	: Ningbo Hangzhou Bay New Zone Zhuoao Light Technology Co., Ltd.
Address.....	: No.758, Wei'er Road, Industrial Zone, Andong Town, Cixi City, Ningbo, China
Telephone.....	: /
Fax.....	: /

Test Result according to the standards on page 7:	Positive
----------------------------------------------------------	-----------------

The test report merely corresponds to the test sample.
 It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENTS

Test Report Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	7
1.1.Description of Standards and Results	7
1.2.Description of Performance Criteria.....	8
2. GENERAL INFORMATION	9
2.1.Description of Device (EUT).....	9
2.2.Description of Test Facility	9
2.3.Statement of the measurement uncertainty.....	9
2.4.Measurement Uncertainty	10
3. MEASURING DEVICES AND TEST EQUIPMENT	11
3.1.Conducted Disturbance.....	11
3.2.Disturbance Power	11
3.3.Radiated Electromagnetic Disturbance.....	11
3.4.Radiated Disturbance (Electric Field)	11
3.5.Harmonic Current.....	11
3.6.Voltage fluctuation and Flicker	11
3.7.Electrostatic Discharge	11
3.8.RF Field Strength Susceptibility.....	12
3.9.Electrical Fast Transient/Burst.....	12
3.10.Surge.....	12
3.11.Conducted Susceptibility	12
3.12.Power Frequency Magnetic Field Susceptibility.....	12
3.13.Voltage Dips.....	12
3.14.Voltage Short Interruptions	12
4. POWER LINE CONDUCTED MEASUREMENT	13
4.1.Block Diagram of Test Setup.....	13
4.2.Conducted Power Line Emission Measurement Standard and Limits.....	13
4.3.EUT Configuration on Test	13
4.4.Operating Condition of EUT	13
4.5.Test Procedure.....	14
4.6.Test Results	14
5. MAGNETIC FIELD EMISSION MEASUREMENT	16
5.1.Block Diagram of Test Setup.....	16
5.2.Magnetic Field Emission Measurement Standard and Limits.....	16
5.3.EUT Configuration on Test	16
5.4.Operating Condition of EUT	16
5.5.Test Procedure.....	17
5.6.Test Results	17
6. RADIATED EMISSION MEASUREMENT	19
6.1.Block Diagram of Test Setup.....	19
6.2.Test Standard.....	19

6.3.Radiated Emission Limits	19
6.4.EUT Configuration on Test	20
6.5.Operating Condition of EUT	20
6.6.Test Procedure.....	20
6.7.Test Results	20
7. HARMONIC CURRENT MEASUREMENT	22
7.1.Block Diagram of Test Setup.....	22
7.2.Test Standard.....	22
7.3.Operating Condition of EUT	22
7.4.Test Results	22
8. VOLTAGE FLUCTUATIONS & FLICKER MEASUREMENT	23
8.1.Block Diagram of Test Setup.....	23
8.2.Test Standard.....	23
8.3.Operating Condition of EUT	23
8.4.Test Results	23
9. ELECTROSTATIC DISCHARGE TEST	25
9.1.Block Diagram of Test Setup.....	25
9.2.Test Standard.....	25
9.3.Severity Levels and Performance Criterion.....	25
9.4.EUT Configuration on Test	25
9.5.Operating Condition of EUT	26
9.6.Test Procedure.....	26
9.7.Test Results	26
10. RF FIELD STRENGTH SUSCEPTIBILITY TEST	28
10.1.Block Diagram of Test Setup.....	28
10.2.Test Standard.....	28
10.3.Severity Levels and Performance Criterion.....	28
10.4.EUT Configuration on Test	29
10.5.Operating Condition of EUT	29
10.6.Test Procedure.....	29
10.7.Test Results	29
11. ELECTRICAL FAST TRANSIENT/BURST TEST	31
11.1.Block Diagram of Test Setup.....	31
11.2.Test Standard.....	31
11.3.Severity Levels and Performance Criterion.....	31
11.4.EUT Configuration on Test	31
11.5.Operating Condition of EUT	31
11.6.Test Procedure.....	32
11.7.Test Results	32
12. SURGE IMMUNITY TEST	34
12.1.Block Diagram of Test Setup.....	34
12.2.Test Standard.....	34

12.3. Severity Levels and Performance Criterion.....	34
12.4. EUT Configuration on Test	34
12.5. Operating Condition of EUT	35
12.6. Test Procedure.....	35
12.7. Test Results	35
13. INJECTED CURRENTS SUSCEPTIBILITY TEST.....	37
13.1. Block Diagram of Test Setup.....	37
13.2. Test Standard.....	37
13.3. Severity Levels and Performance Criterion.....	37
13.4. EUT Configuration on Test	37
13.5. Operating Condition of EUT	38
13.6. Test Procedure.....	38
13.7. Test Results	38
14. MAGNETIC FIELD IMMUNITY TEST.....	40
14.1. Block Diagram of Test Setup.....	40
14.2. Test Standard.....	40
14.3. Severity Levels and Performance Criterion.....	40
14.4. EUT Configuration on Test	40
14.5. Operating Condition of EUT	41
14.6. Test Procedure.....	41
14.7. Test Results	41
15. VOLTAGE DIPS AND INTERRUPTIONS TEST	43
15.1. Block Diagram of Test Setup.....	43
15.2. Test Standard.....	43
15.3. Severity Levels and Performance Criterion.....	43
15.4. EUT Configuration on Test	43
15.5. Operating Condition of EUT	44
15.6. Test Procedure.....	44
15.7. Test Results	44
16. PHOTOGRAPH	46
16.1. Photo of Power Line Conducted Measurement.....	46
16.2. Photo of Radiated Electromagnetic Disturbance Measurement.....	46
16.3. Photo of Radiated Measurement.....	47
16.4. Photo of Harmonic & Flicker Measurement	47
16.5. Photo of Electrostatic Discharge Test	48
16.6. Photo of Electrical Fast Transient/Burst Test.....	48
16.7. Photo of Surge Immunity Test.....	49
16.8. Photo of Injected Currents Susceptibility Test.....	49
16.9. Photo of Magnetic Field Immunity Test.....	50
16.10. Photo of Voltage Dips and Short Interruptions Immunity Test.....	50
17. EXTERNAL AND INTERNAL PHOTOS OF THE EUT.....	51

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION (EN 55015: 2013)			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	EN 55015: 2013	-----	PASS
Magnetic field emission	EN 55015: 2013	-----	PASS
Radiated disturbance	EN 55015: 2013	-----	PASS
Harmonic current emissions	EN 61000-3-2: 2006+A1: 2009+A2: 2009	Class C	PASS
Voltage fluctuations & flicker	EN 61000-3-3: 2013	-----	PASS
IMMUNITY (EN 61547: 2009)			
Description of Test Item	Basic Standard	Performance Criteria	Results
Electrostatic discharge (ESD)	EN 61000-4-2: 2009	B	PASS
Radio-frequency, Continuous radiated disturbance	EN 61000-4-3: 2006+A1: 2008	A	PASS
Electrical fast transient (EFT)	EN 61000-4-4: 2004+A1: 2010	B	PASS
Surge (Input a.c. power ports)	EN 61000-4-5: 2006	B	PASS
Radio-frequency, Continuous conducted disturbance	EN 61000-4-6: 2009	A	PASS
Power frequency magnetic field	EN 61000-4-8: 2010	A	PASS
Voltage dips, 30% reduction	EN 61000-4-11: 2004	C	PASS
Voltage interruptions		B	PASS
N/A is an abbreviation for Not Applicable.			

1.2. Description of Performance Criteria

General Performance Criteria

Examples of functions defined by the manufacturer to be evaluated during testing include, but are not limited to, the following:

- essential operational modes and states;
- tests of all peripheral access (hard disks, floppy disks, printers, keyboard, mouse, etc.);
- quality of software execution;
- quality of data display and transmission;
- quality of speech transmission.

1.2.1. Performance criterion A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacture when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

1.2.2. Performance criterion B

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacture, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operation state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

1.2.3. Performance criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacture's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : LED Bulb Light
Model Number : ZG120-18W-01
Power Supply : AC 180-240V, 50-60Hz, 18W

2.2. Description of Test Facility

EMC Lab. : CNAS Registration Number. is L4595.
FCC Registration Number. is 899208.
Industry Canada Registration Number. is 9642A-1.
VCCI Registration Number. is C-4260 and R-3804.
ESMD Registration Number. is ARCB0108.
UL Registration Number. is 100571-492.
TUV SUD Registration Number. is SCN1081.
TUV RH Registration Number. is UA 50296516-001

2.3. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

2.4.Measurement Uncertainty

Test Item	Frequency Range	Expanded uncertainty (U _{lab})	Expanded uncertainty (U _{cispr})
Conducted Emission	(9kHz to 150kHz)	2.63 dB	4.0 dB
	(150kHz to 30MHz)	2.35 dB	3.6 dB
Power disturbance	(30MHz to 300MHz)	2.90dB	4.5 dB
Electromagnetic Radiated Emission (3-loop)	(9kHz to 30MHz)	3.60 dB	N/A
Radiated Emission	(9kHz to 30MHz)	3.68 dB	N/A
Radiated Emission	(30MHz to 1000MHz)	3.48 dB	5.2 dB
Radiated Emission	(above 1000MHz)	3.90 dB	N/A
Mains Harmonic	Voltage	0.510%	N/A
Voltage Fluctuations & Flicker	Voltage	0.510%	N/A

- (1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.
- (2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

3. MEASURING DEVICES AND TEST EQUIPMENT

3.1. Conducted Disturbance

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2014/06/18
2	10dB Attenuator	SCHWARZBECK	OSPAM236	9729	2014/06/18
3	Artificial Mains	ROHDE & SCHWARZ	ENV216	101288	2014/06/18
4	EMI Test Software	AUDIX	E3	N/A	2014/06/18

3.2. Disturbance Power

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2014/06/18
2	Absorbing clamp	ROHDE & SCHWARZ	MDS 21	4033	2013/08/30
3	EMI Test Software	AUDIX	E3	N/A	2014/06/18

3.3. Radiated Electromagnetic Disturbance

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	1011423	2014/06/18
2	Triple-loop Antenna	EVERFINE	LLA-2	11050003	2014/06/18
3	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2014/06/18
4	EMI Test Software	AUDIX	E3	N/A	2014/06/18

3.4. Radiated Disturbance (Electric Field)

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2014/02/04
2	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2014/06/18
3	Log per Antenna	SCHWARZBECK	VULB9163	9163-470	2014/06/18
4	EMI Test Software	AUDIX	E3	N/A	2014/06/18
5	Positioning Controller	MF	MF-7082	/	2014/06/18

3.5. Harmonic Current

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power Analyzer Test System	Voltech	PM6000	20000670053	2014/06/18

3.6. Voltage fluctuation and Flicker

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power Analyzer Test System	Voltech	PM6000	20000670053	2014/06/18

3.7. Electrostatic Discharge

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ESD Simulator	KIKUSUI	KC001311	KES4021	2014/09/02

3.8.RF Field Strength Susceptibility

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	SIGNAL GENERATOR	HP	8648A	625U00573	2014/06/18
2	Amplifier	AR	500A100	17034	2014/06/18
3	Amplifier	AR	100W/1000M1	17028	2014/06/18
4	Isotropic Field Monitor	AR	FM2000	16829	2014/06/18
5	Isotropic Field Probe	AR	FP2000	16755	2014/06/18
6	Bi-conic Antenna	EMCO	3108	9507-2534	2014/06/18
7	By-log-periodic Antenna	AR	AT1080	16812	2014/06/18
8	EMS Test Software	ROHDE & SCHWARZ	ESK1	N/A	2014/06/18

3.9.Electrical Fast Transient/Burst

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Electrical fast transient(EFT)generator	3CTEST	EFT-4021	EC0461044	2014/01/20
2	Coupling Clamp	3CTEST	EFTC	EC0441098	2014/06/18

3.10.Surge

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Surge test system	3CTEST	SG5006G	EC5581070	2014/06/18
2	Coupling/decoupling network	3CTEST	SGN-5010G	CS5591033	2014/06/18

3.11.Conducted Susceptibility

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Simulator	EMTEST	CIT-10	A126A1195	2014/06/18
2	CDN	EMTEST	CDN-M2	A2210177	2014/06/18
3	CDN	EMTEST	CDN-M3	A2210177	2014/06/18
4	Attenuator	EMTEST	ATT6	50FP-006-H3B	2014/06/18

3.12.Power Frequency Magnetic Field Susceptibility

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power frequency mag-field generator System	EVERFINE	EMS61000-8K	906003	2014/06/18

3.13.Voltage Dips


Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Voltage dips and up generator	3CTEST	VDG-1105G	EC0171014	2014/06/18

3.14.Voltage Short Interruptions

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Voltage dips and up generator	3CTEST	VDG-1105G	EC0171014	2014/06/18

4. POWER LINE CONDUCTED MEASUREMENT

4.1. Block Diagram of Test Setup

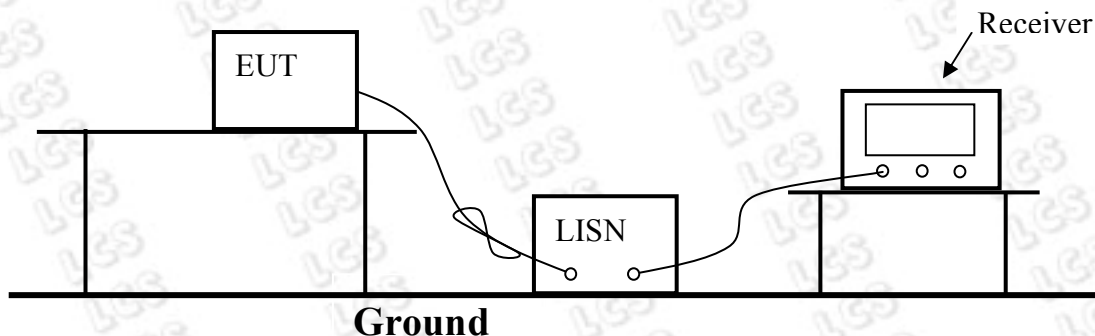

4.2. Conducted Power Line Emission Measurement Standard and Limits

4.2.1. Standard:

EN 55015: 2013

4.2.2. Limits

Frequency	At mains terminals (dB μ V)	
	Quasi-peak Level	Average Level
9kHz ~ 50kHz	110	--
50kHz ~ 150kHz	90 ~ 80*	--
150kHz ~ 0.5MHz	66 ~ 56*	56 ~ 46*
0.5MHz ~ 5.0MHz	56	46
5.0MHz ~ 30MHz	60	50

1. At the transition frequency the lower limit applies.
2. * decreasing linearly with logarithm of the frequency.

4.3. EUT Configuration on Test

The configuration of the EUT is same as Section 3.1.

4.4. Operating Condition of EUT

- 4.4.1. Setup the EUT as shown in Section 4.1.
- 4.4.2. Turn on the power of all equipments.
- 4.4.3. Let the EUT work in test mode (On) and measure it.

4.5. Test Procedure

The EUT is put on the table which is 0.8 meter high above the ground and connected to the AC mains through a Line Impedance Stabilization Network (L.I.S.N.). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission according to the EN 55015 regulations during conducted emission measurement. And the voltage probe had been used for the load terminals measurement according to the EN 55015 standard.

The bandwidth of the test receiver is set at 200Hz in 9k~150kHz range and 9kHz in 150k~30MHz range.

The frequency range from 9kHz to 30MHz is checked.

All the test results are listed in Section 4.6.


The frequency range from 9kHz to 30MHz is investigated.

4.6. Test Results

PASS.

The test result please refer to the next page.

Model No.	ZG120-18W-01	Test Mode	ON
Environmental Conditions	24°C, 56% RH	Test Engineer	Jayden Zhuo
Pol	Line		

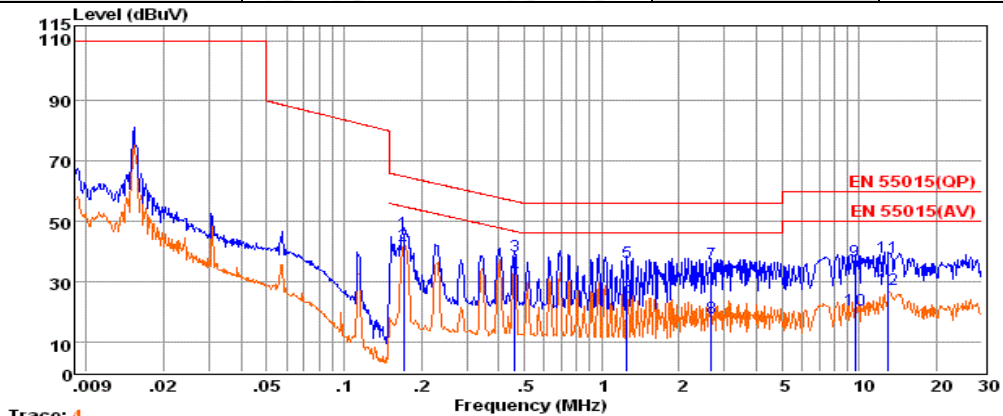


Trace: 4

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.17102	26.37	9.60	0.02	10.00	45.99	64.91	-18.92	QP
2 0.17112	22.44	9.60	0.02	10.00	42.06	64.91	-22.85	Average
3 0.46009	18.67	9.62	0.04	10.00	38.33	56.69	-18.36	QP
4 0.46019	12.19	9.62	0.04	10.00	31.85	56.69	-24.84	Average
5 1.25799	16.67	9.63	0.05	10.00	36.35	56.00	-19.65	QP
6 1.25899	4.97	9.63	0.05	10.00	24.65	56.00	-31.35	Average
7 2.67487	16.14	9.64	0.05	10.00	35.83	56.00	-20.17	QP
8 2.67587	-1.78	9.64	0.05	10.00	17.91	56.00	-38.09	Average
9 9.63648	16.96	9.69	0.08	10.00	36.73	60.00	-23.27	QP
10 9.63748	0.87	9.69	0.08	10.00	20.64	60.00	-39.36	Average
1113.00962	18.10	9.70	0.09	10.00	37.89	60.00	-22.11	QP
1213.01062	7.52	9.70	0.09	10.00	27.31	60.00	-32.69	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

Model No.	ZG120-18W-01	Test Mode	ON
Environmental Conditions	24°C, 56% RH	Test Engineer	Jayden Zhuo
Pol	Neutral		

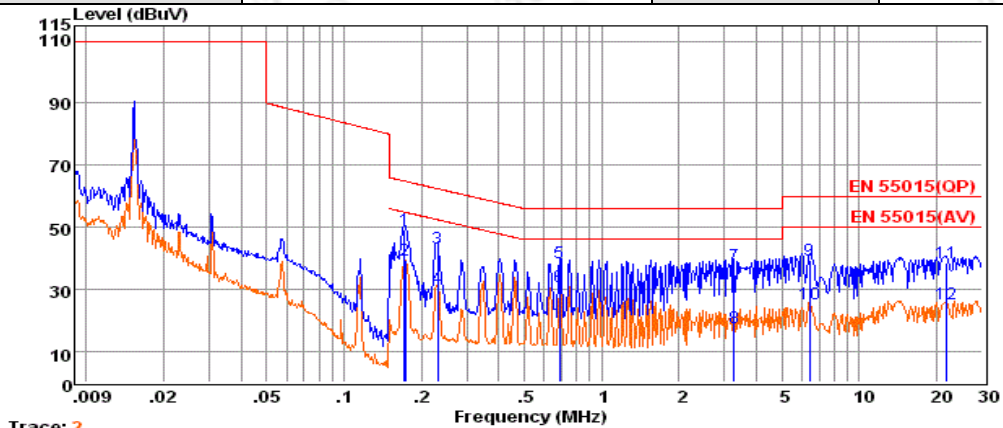


Trace: 2

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.17241	29.64	9.65	0.02	10.00	49.31	64.84	-15.53	QP
2 0.17251	19.61	9.65	0.02	10.00	39.28	64.84	-25.56	Average
3 0.23088	23.51	9.59	0.03	10.00	43.13	62.42	-19.29	QP
4 0.23098	10.55	9.59	0.03	10.00	30.17	62.41	-32.24	Average
5 0.68464	18.68	9.63	0.04	10.00	38.35	56.00	-17.65	QP
6 0.68474	11.01	9.63	0.04	10.00	30.68	56.00	-25.32	Average
7 3.27624	17.99	9.65	0.06	10.00	37.70	56.00	-18.30	QP
8 3.27724	-2.34	9.65	0.06	10.00	17.37	56.00	-38.63	Average
9 6.42354	19.75	9.68	0.07	10.00	39.50	60.00	-20.50	QP
10 6.42454	5.40	9.68	0.07	10.00	25.15	60.00	-34.85	Average
1121.68733	18.54	9.82	0.12	10.00	38.48	60.00	-21.52	QP
1221.68833	5.40	9.82	0.12	10.00	25.34	60.00	-34.66	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

5. MAGNETIC FIELD EMISSION MEASUREMENT

5.1. Block Diagram of Test Setup

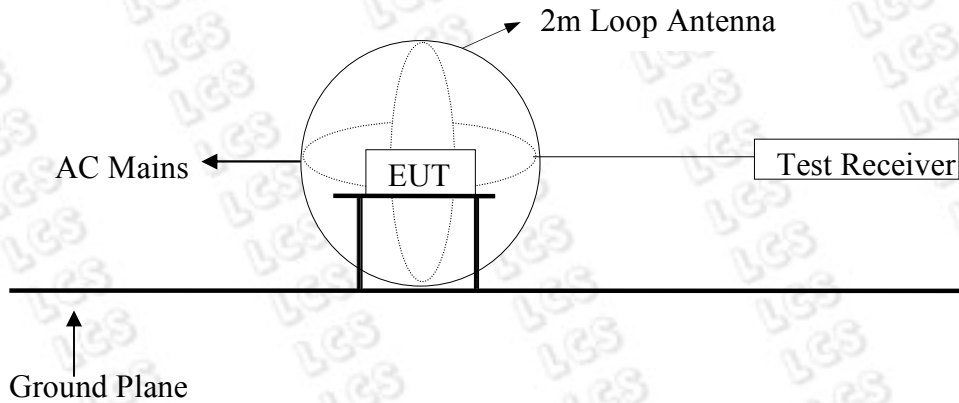

5.2. Magnetic Field Emission Measurement Standard and Limits

5.2.1. Test Standard

EN 55015: 2013

5.2.2. Test Limits

Frequency	Limits for loop diameter (dB μ A)
	2m
9kHz ~ 70kHz	88
70kHz ~ 150kHz	88 ~ 58*
150kHz ~ 3.0MHz	58 ~ 22*
3.0MHz ~ 30MHz	22

1. At the transition frequency the lower limit applies.
2. * decreasing linearly with logarithm of the frequency.

5.3. EUT Configuration on Test

The configuration of the EUT is same as Section 3.3.

5.4. Operating Condition of EUT

Same as conducted measurement which is listed in Section 4.4, except the test set up replaced by Section 5.1.

5.5. Test Procedure

The EUT is placed on a wood table in the center of a loop antenna. The induced current in the loop antenna is measured by means of a current probe and the test receiver. Three field components are checked by means of a coaxial switch.

The frequency range from 9kHz to 30MHz is investigated. The receiver is measured with the quasi-peak detector. For frequency band 9kHz to 150kHz, the bandwidth of the field strength meter is set at 200Hz. For frequency band 150kHz to 30MHz, the bandwidth is set at 9kHz.


All the test results are listed in Section 5.6.

5.6. Test Results

PASS.

The frequency range from 9kHz to 30MHz is investigated.


Model No.	ZG120-18W-01	Test Mode	ON
Environmental Conditions	24°C, 56% RH	Test Engineer	Jayden Zhuo
Pol	X		

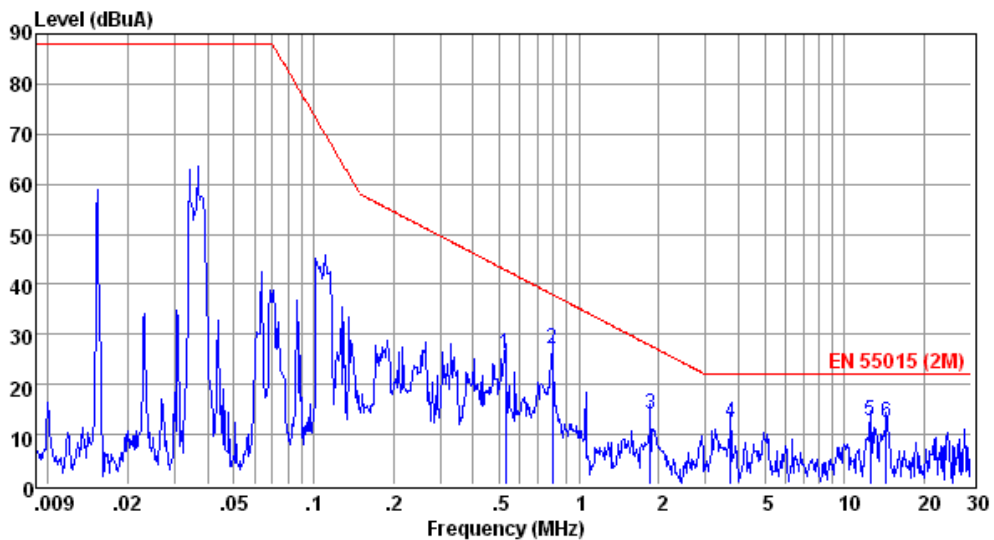

Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark	
MHz	dBuA	dB	dB	dBuA	dBuA	dB		
1	0.53	-35.54	60.93	0.63	26.02	42.87	-16.85	QP
2	0.79	-34.08	60.51	0.65	27.08	38.00	-10.92	QP
3	1.86	-45.19	58.59	0.68	14.08	27.77	-13.69	QP
4	3.73	-43.34	54.90	0.71	12.27	22.00	-9.73	QP
5	12.49	-35.90	47.86	0.83	12.79	22.00	-9.21	QP
6	14.34	-35.97	47.59	0.84	12.46	22.00	-9.54	QP

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.
 2. The emission levels that are 20dB below the official limit are not reported.


Model No.	ZG120-18W-01	Test Mode	ON
Environmental Conditions	24°C, 56% RH	Test Engineer	Jayden Zhuo
Pol	Y		

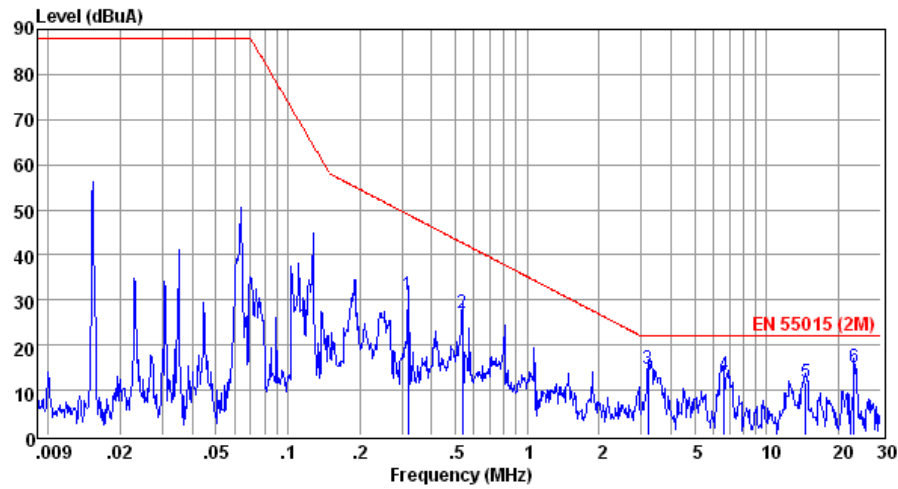

	Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBuA	dB	dB	dBuA	dBuA	dB	
1	0.32	-28.44	59.04	0.60	31.20	48.92	-17.72	QP
2	0.54	-32.64	59.12	0.63	27.11	42.68	-15.57	QP
3	3.20	-42.58	56.56	0.70	14.68	22.00	-7.32	QP
4	6.64	-38.70	51.32	0.76	13.38	22.00	-8.62	QP
5	14.57	-37.15	48.07	0.84	11.76	22.00	-10.24	QP
6	23.14	-33.19	47.24	0.88	14.93	22.00	-7.07	QP

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.
 2. The emission levels that are 20dB below the official limit are not reported.

Model No.	ZG120-18W-01	Test Mode	ON
Environmental Conditions	24°C, 56% RH	Test Engineer	Jayden Zhuo
Pol	Z		

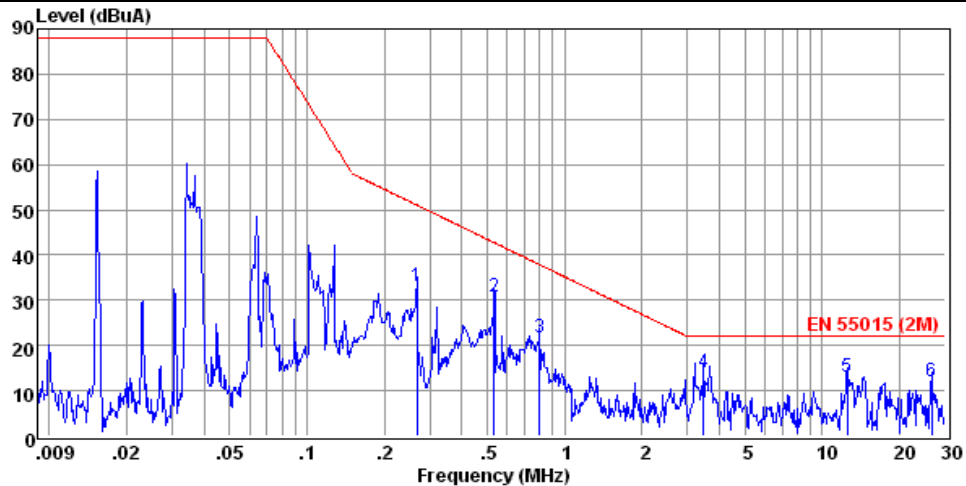


	Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBuA	dB	dB	dBuA	dBuA	dB	
1	0.27	-26.24	58.71	0.58	33.05	51.06	-18.01	QP
2	0.53	-28.76	58.80	0.63	30.67	42.78	-12.11	QP
3	0.80	-37.74	58.70	0.65	21.61	37.90	-16.29	QP
4	3.47	-42.76	56.20	0.71	14.15	22.00	-7.85	QP
5	12.49	-37.07	49.42	0.83	13.18	22.00	-8.82	QP
6	26.56	-36.12	47.15	0.89	11.92	22.00	-10.08	QP

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.
 2. The emission levels that are 20dB below the official limit are not reported.

6. RADIATED EMISSION MEASUREMENT

6.1. Block Diagram of Test Setup

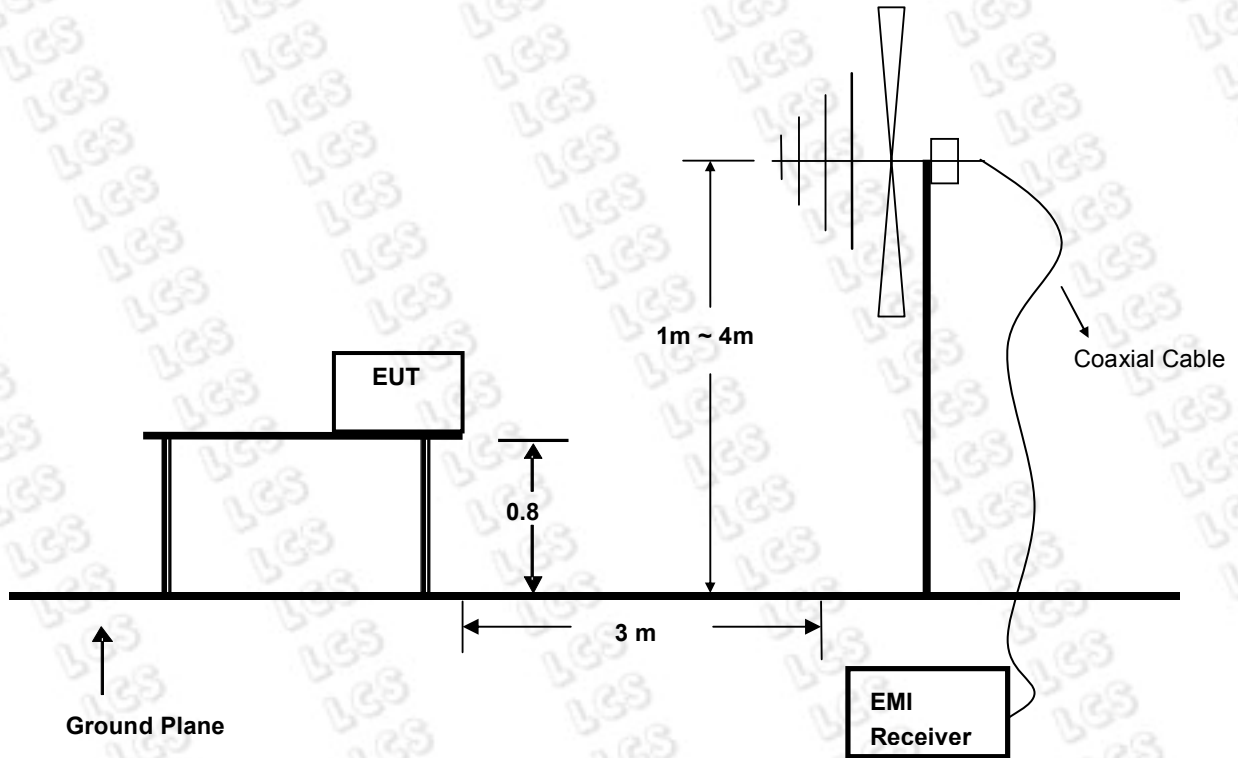

6.2. Test Standard

EN 55015: 2013

6.3. Radiated Emission Limits

All emanations from a class B device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMIT (dB μ V/m)
30 ~ 230	3	40
230 ~ 300	3	47

- Note: (1) The smaller limit shall apply at the combination point between two frequency bands.
 (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.

6.4.EUT Configuration on Test

The EN 55015 regulations test method must be used to find the maximum emission during radiated emission measurement.

6.5.Operating Condition of EUT

6.5.1 Turn on the power.

6.5.2 After that, let the EUT work in test mode (ON) and measure it.

6.6.Test Procedure

The EUT is placed on a turntable, which is 0.8 meter high above the ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. By-log antenna (calibrated by Dipole Antenna) is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test.

The bandwidth of the Receiver is set at 120kHz.


The frequency range from 30MHz to 300MHz is investigated.

6.7.Test Results

PASS.

The test result please refer to the next page.


Model No.	ZG120-18W-01	Test Mode	ON
Environmental Conditions	24°C, 56% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	Jayden Zhuo		

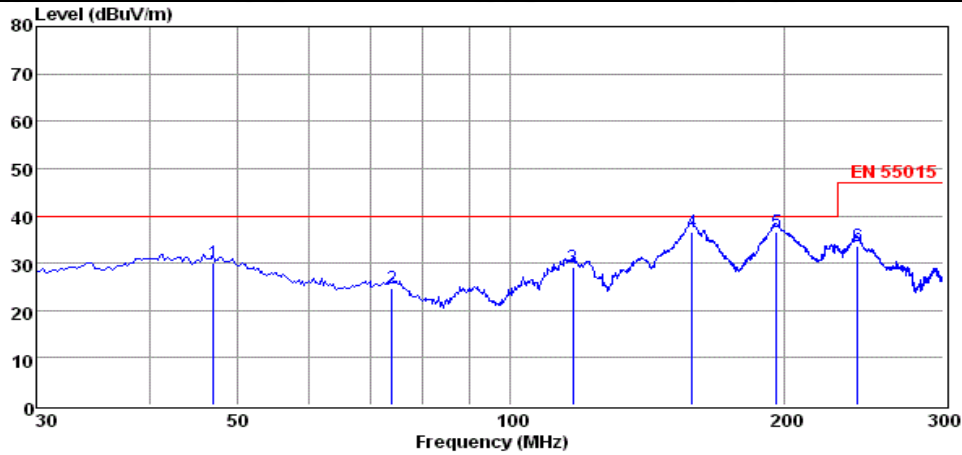

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	47.01	16.32	0.35	13.43	30.10	40.00	-9.90	QP
2	74.01	16.26	0.54	7.97	24.77	40.00	-15.23	QP
3	117.21	17.56	0.68	10.97	29.21	40.00	-10.79	QP
4	158.52	27.13	0.83	8.61	36.57	40.00	-3.43	QP
5	196.59	24.96	0.96	10.57	36.49	40.00	-3.51	QP
6	241.41	20.59	1.01	12.09	33.69	47.00	-13.31	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that at 20db below the official limit are not reported

Model No.	ZG120-18W-01	Test Mode	ON
Environmental Conditions	24°C, 56% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	Jayden Zhuo		

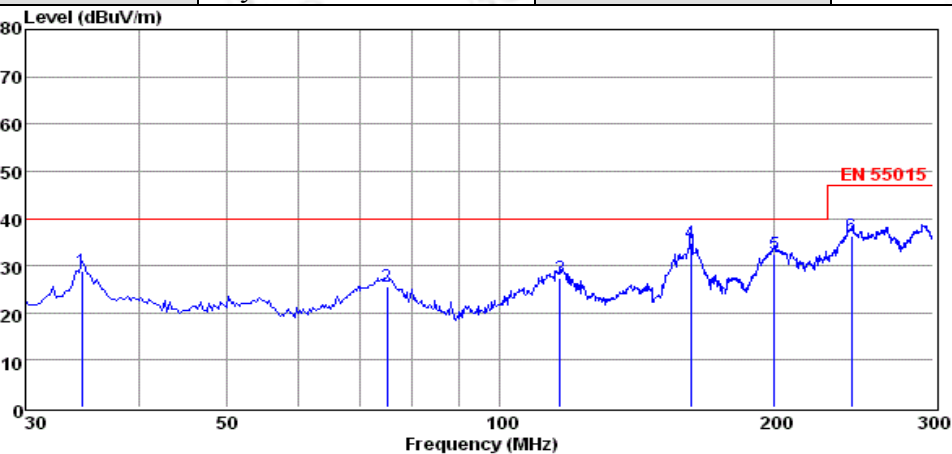


	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	34.59	16.15	0.41	12.30	28.86	40.00	-11.14	QP
2	75.09	17.24	0.54	7.81	25.59	40.00	-14.41	QP
3	116.40	15.65	0.68	11.12	27.45	40.00	-12.55	QP
4	162.30	25.21	0.86	8.74	34.81	40.00	-5.19	QP
5	200.64	20.89	0.84	10.59	32.32	40.00	-7.68	QP
6	243.84	23.32	0.90	12.08	36.30	47.00	-10.70	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that at 20db below the official limit are not reported

7. HARMONIC CURRENT MEASUREMENT

7.1. Block Diagram of Test Setup

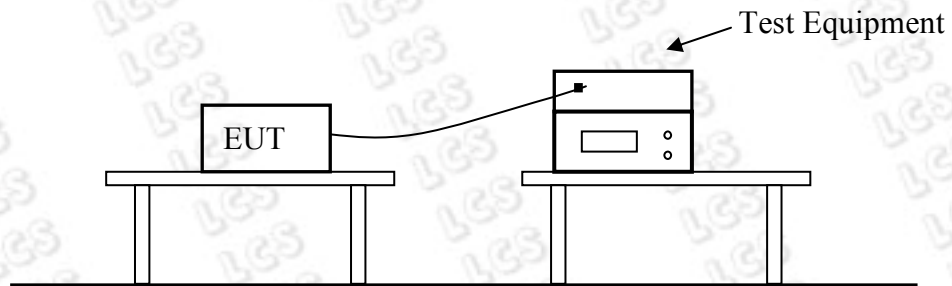

7.2. Test Standard

EN 61000-3-2: 2006+A1: 2009+A2: 2009

7.3. Operating Condition of EUT

Same as Section 4.4, except the test setup replaced by Section 7.1.


7.4. Test Results

PASS.

Because power of EUT less than 25W, According standard EN 61000-3-2,
Harmonic current unnecessary to test.

8. VOLTAGE FLUCTUATIONS & FLICKER MEASUREMENT

8.1. Block Diagram of Test Setup

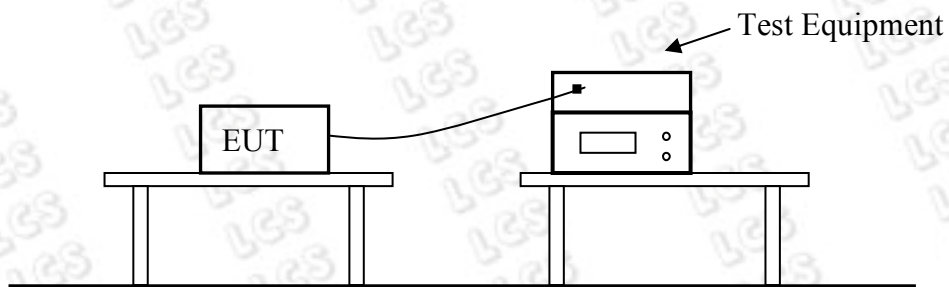

8.2. Test Standard

EN 61000-3-3: 2013

8.3. Operating Condition of EUT

Same as Section 4.4, except the test setup replaced by Section 8.1.

8.4. Test Results


PASS.

The test result please refer to the next page.

Model No.	ZG120-18W-01	Test Engineer	Jayden Zhuo	
Voltech IEC61000-3 Windows Software 1.24.12				
Type of Test:	Flickermeter Test - Table			
Power Analyzer:	Voltech PM6000 SN: 200006700523 Firmware Version: v1.21.07RC2			
Channel(s):	1. SN: 090015502053, 28 Adjusted Date: 22 JUN 2011. 2. SN:None Adjusted Date:None			
	3. SN:None Adjusted Date:None 4. SN:None Adjusted Date:None			
	5. SN:None Adjusted Date:None 6. SN:None Adjusted Date:None			
Shunt(s):	1. SN: 091024301916, 4 Adjusted Date: 23 JUN 2011. 2. SN:None Adjusted Date:None			
	3. SN:None Adjusted Date:None 4. SN:None Adjusted Date:None			
	5. SN:None Adjusted Date:None 6. SN:None Adjusted Date:None			
AC Source:	Mains / Manual Source			
Overall Result:	Notes:			
PASS				
	Pst	dc (%)	dmax (%)	d(t) > 3.3%(ms)
Limit	1.000	3.300	4.000	500
Reading 1	0.071	0.000	0.000	0

9. ELECTROSTATIC DISCHARGE TEST

9.1. Block Diagram of Test Setup

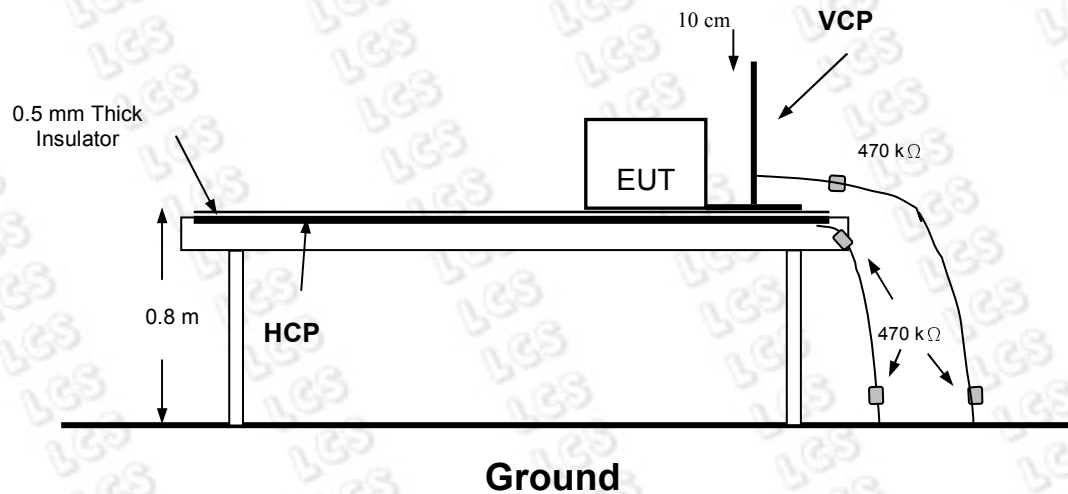

9.2. Test Standard

EN 61547: 2009 (EN 61000-4-2: 2009, Severity Level: Air Discharge: Level 3, ±8KV
Contact Discharge: Level 2, ±4KV)

9.3. Severity Levels and Performance Criterion

9.3.1. Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	±2	±2
2.	±4	±4
3.	±6	±8
4.	±8	±15
X	Special	Special

9.3.2. Performance criterion: **B**

9.4. EUT Configuration on Test

The configuration of EUT is listed in Section 3.7

9.5. Operating Condition of EUT

- 9.5.1. Setup the EUT as shown in Section 9.1.
- 9.5.2. Turn on the power of all equipments.
- 9.5.3. Let the EUT work in test mode (ON) and measure it.

9.6. Test Procedure

9.6.1. Air Discharge

This test is done on a non-conductive surfaces. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

Because the case of the EUT is metal surface, so it does not need to be tested.

9.6.2. Contact Discharge

All the procedure shall be same as Section 9.6.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

9.6.3. Indirect Discharge For Horizontal Coupling Plane

At least 20 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

9.6.4. Indirect Discharge For Vertical Coupling Plane

At least 20 single discharge shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

9.7. Test Results

PASS.

Please refer to the following page.

Electrostatic Discharger Test Results

Standard	<input type="checkbox"/> IEC 61000-4-2 <input checked="" type="checkbox"/> EN 61000-4-2		
Applicant	Ningbo Hangzhou Bay New Zone Zhuoao Light Technology Co., Ltd.		
EUT	LED Bulb Light	Temperature	26°C
M/N	ZG120-18W-01	Humidity	51%
Criterion	B	Pressure	1021mbar
Test Mode	ON	Test Engineer	Jayden Zhuo

Air Discharge						
Test Points	Test Levels			Results		
	± 2KV	± 4KV	± 8KV	Pass	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Top	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Bottom	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B


Contact Discharge						
Test Points	Test Levels		Results			
	± 2 KV	±4 KV	Pass	Fail	Performance Criterion	
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B
Top	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B
Bottom	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B

Discharge To Horizontal Coupling Plane						
Side of EUT	Test Levels		Results			
	± 2 KV	± 4 KV	Pass	Fail	Performance Criterion	
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B

Discharge To Vertical Coupling Plane						
Side of EUT	Test Levels		Results			
	± 2 KV	± 4 KV	Pass	Fail	Performance Criterion	
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B

10. RF FIELD STRENGTH SUSCEPTIBILITY TEST

10.1. Block Diagram of Test Setup

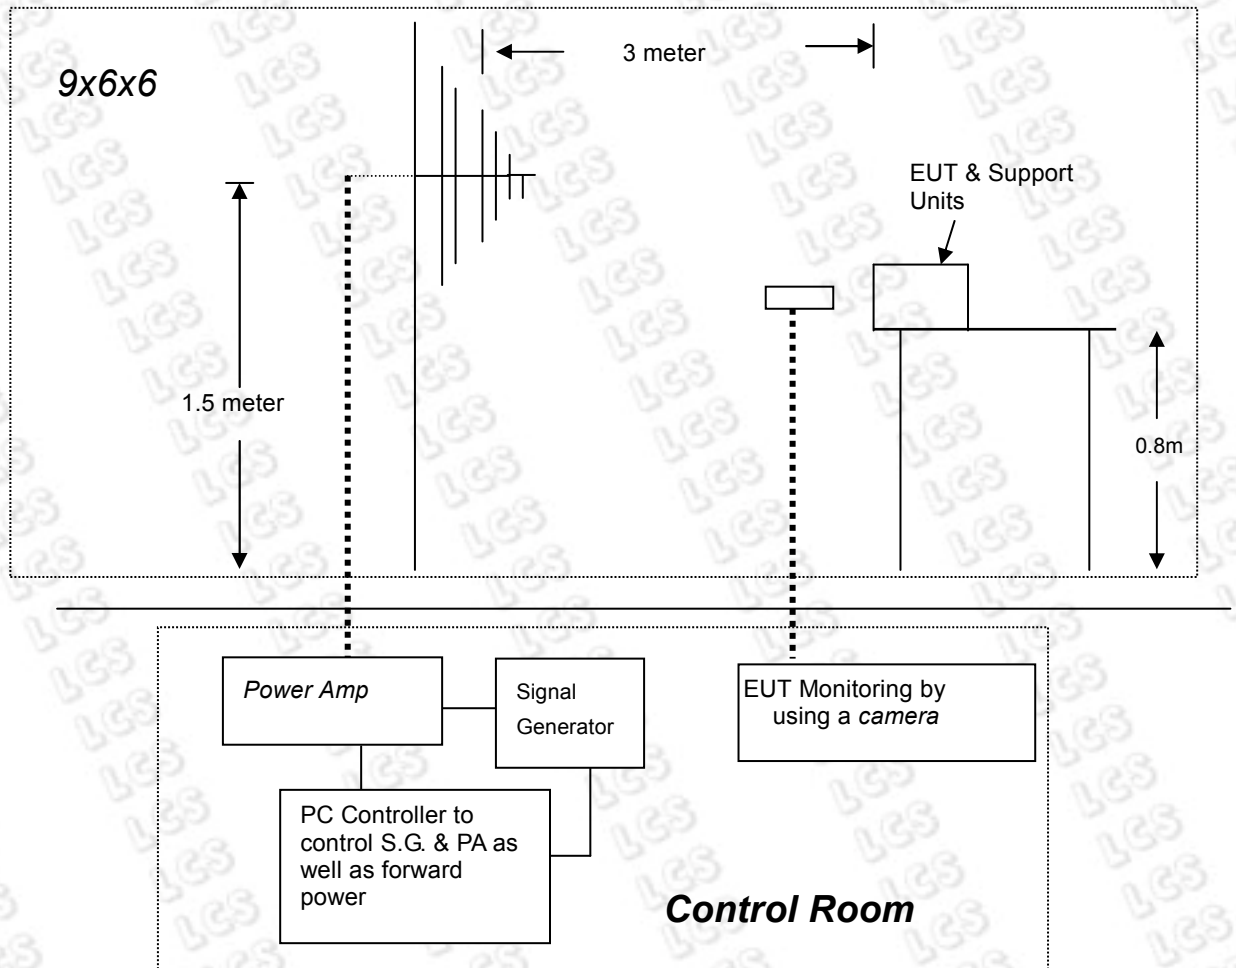

10.2. Test Standard

EN 61547: 2009 (EN 61000-4-3: 2006+A1: 2008, Severity Level: 2, 3V / m)

10.3. Severity Levels and Performance Criterion

10.3.1. Severity level

Level	Field Strength (V/m)
1	1
2	3
3	10
X	Special

10.3.2. Performance criterion: A

10.4.EUT Configuration on Test

The configuration of EUT are listed in Section 3.8.

10.5.Operating Condition of EUT

10.5.1.Setup the EUT as shown in Section 10.1.

10.5.2.Turn on the power of all equipments.

10.5.3.Let the EUT work in test mode (On) and measure it.

10.6.Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. EUT is set 3 meter away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD camera is used to monitor EUT screen. All the scanning conditions are as follows:

Condition of Test	Remarks
1. Fielded Strength	3 V/m (Severity Level 2)
2. Radiated Signal	Unmodulated
3. Scanning Frequency	80 - 1000 MHz
4. Dwell time of radiated	0.0015 decade/s
5. Waiting Time	3 Sec.

10.7.Test Results

PASS.

Please refer to the following page.

RF Field Strength Susceptibility Test Results

Standard	<input type="checkbox"/> IEC 61000-4-3 <input checked="" type="checkbox"/> EN 61000-4-3		
Applicant	Ningbo Hangzhou Bay New Zone Zhuoao Light Technology Co., Ltd.		
EUT	LED Bulb Light	Temperature	26°C
M/N	ZG120-18W-01	Humidity	51%
Field Strength	3 V/m	Criterion	A
Test Mode	ON	Test Engineer	Jayden Zhuo
Frequency Range	80 MHz to 1000 MHz		
Modulation	<input type="checkbox"/> None <input type="checkbox"/> Pulse <input checked="" type="checkbox"/> AM 1KHz 80%		
Steps	1%		

	Horizontal	Vertical
Front	PASS	PASS
Right	PASS	PASS
Rear	PASS	PASS
Left	PASS	PASS


Test Equipment:

1. Signal Generator: 2031 (MARCONI)
2. Power Amplifier: 500A100 & 100W/1000M1 (A&R)
3. Power Antenna: 3108 (EMCO) & AT1080 (A&R)
4. Field Monitor: FM2000 (A&R)

Note:

11. ELECTRICAL FAST TRANSIENT/BURST TEST

11.1. Block Diagram of Test Setup

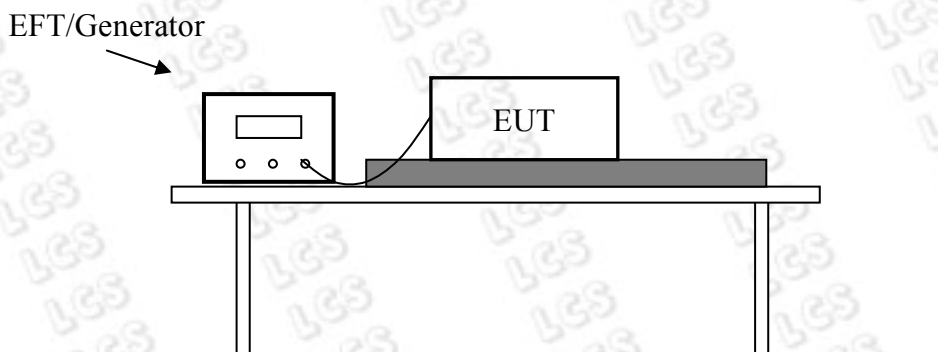

11.2. Test Standard

EN 61547: 2009 (EN 61000-4-4: 2004+A1: 2010, Severity Level: Level 2: 1KV)

11.3. Severity Levels and Performance Criterion

11.3.1. Severity level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On LED Bulb Light Lines	On I/O (Input/Output) Signal data and control lines
1.	0.5 KV	0.25 KV
2.	1 KV	0.5 KV
3.	2 KV	1 KV
4.	4 KV	2 KV
X	Special	Special

11.3.2. Performance criterion: **B**

11.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.9.

11.5. Operating Condition of EUT

11.5.1. Setup the EUT as shown in Section 11.1.

11.5.2. Turn on the power of all equipments.

11.5.3. Let the EUT work in test mode (ON) and measure it.

11.6. Test Procedure

The EUT is put on the table which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

11.6.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

11.6.2. For signal lines and control lines ports:

No I/O ports. It's unnecessary to test.

11.6.3. For DC output line ports:

It's unnecessary to test.

11.7. Test Results

PASS.

Please refer to the following page.


Electrical Fast Transient/Burst Test Results

Standard	<input type="checkbox"/> IEC 61000-4-4 <input checked="" type="checkbox"/> EN 61000-4-4		
Applicant	Ningbo Hangzhou Bay New Zone Zhuoao Light Technology Co., Ltd.		
EUT	LED Bulb Light	Temperature	26℃
M/N	ZG120-18W-01	Humidity	51%
Test Mode	ON	Criterion	B
Test Engineer	Jayden Zhuo		

Line	Test Voltage	Result (+)	Result (-)
L	1KV	PASS	PASS
N	1KV	PASS	PASS
PE			
L-N	1KV	PASS	PASS
L-PE			
N-PE			
L-N-PE			
Signal Line			
I/O Cable			
Note:			

12. SURGE IMMUNITY TEST

12.1. Block Diagram of Test Setup

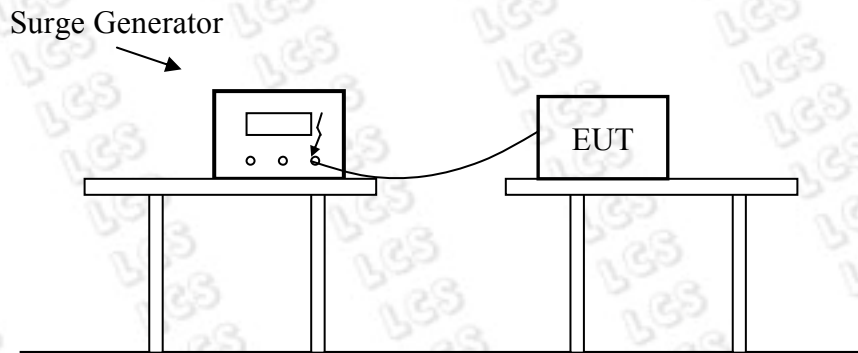

12.2. Test Standard

EN 61547: 2009 (EN61000-4-5: 2006, Severity Level: Line to Line: Level 2, 1.0KV;
Line to Earth: Level 3, 2.0KV)

12.3. Severity Levels and Performance Criterion

12.3.1. Severity level

Severity Level	Open-Circuit Test Voltage (KV)
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

12.3.2. Performance criterion: **B**

12.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.10

12.5. Operating Condition of EUT

- 12.5.1. Setup the EUT as shown in Section 12.1.
- 12.5.2. Turn on the power of all equipments.
- 12.5.3. Let the EUT work in test mode (ON) and measure it.

12.6. Test Procedure

- 12.6.1. Set up the EUT and test generator as shown on Section 12.1.
- 12.6.2. For line to line coupling mode, provide a 1.0KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.
- 12.6.3. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 12.6.4. Different phase angles are done individually.
- 12.6.5. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

12.7. Test Results

PASS.


Please refer to the following page.

Surge Immunity Test Result			
Standard	<input type="checkbox"/> IEC 61000-4-5 <input checked="" type="checkbox"/> EN 61000-4-5		
Applicant	Ningbo Hangzhou Bay New Zone Zhuoao Light Technology Co., Ltd.		
EUT	LED Bulb Light	Temperature	26°C
M/N	ZG120-18W-01	Humidity	51%
Test Mode	ON	Criterion	B
Test Engineer	Jayden Zhuo		

Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (KV)	Result
L-N	+	0°	5	0.5	PASS
	+	90°	5	0.5	PASS
	+	180°	5	0.5	PASS
	+	270°	5	0.5	PASS
	-	0°	5	0.5	PASS
	-	90°	5	0.5	PASS
	-	180°	5	0.5	PASS
	-	270°	5	0.5	PASS
L-PE					
N-PE					
Signal Line					
Note					

13. INJECTED CURRENTS SUSCEPTIBILITY TEST

13.1. Block Diagram of Test Setup

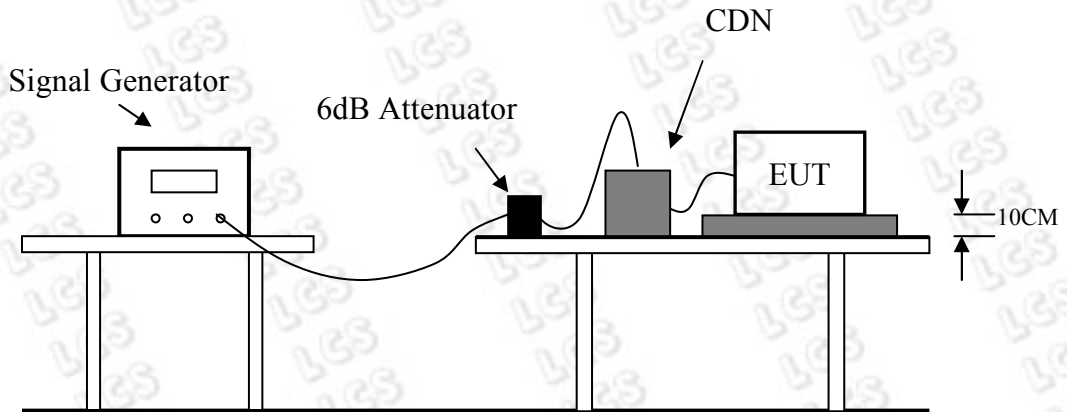

13.2. Test Standard

EN 61547: 2009 (EN 61000-4-6: 2009, Severity Level: 3V (rms), 0.15MHz ~ 80MHz)

13.3. Severity Levels and Performance Criterion

13.3.1. Severity level

Level	Field Strength (V)
1.	1
2.	3
3.	10
X	Special

13.3.2. Performance criterion: A

13.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.11.

13.5. Operating Condition of EUT

- 13.5.1. Setup the EUT as shown in Section 13.1.
- 13.5.2. Turn on the power of all equipments.
- 13.5.3. Let the EUT work in test mode (ON) and measure it.

13.6. Test Procedure

- 13.6.1. Set up the EUT, CDN and test generators as shown on Section 13.1.
- 13.6.2. Let the EUT work in test mode and measure it.
- 13.6.3. The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 13.6.4. The disturbance signal described below is injected to EUT through CDN.
- 13.6.5. The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 13.6.6. The frequency range is swept from 150kHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave.
- 13.6.7. The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 13.6.8. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

13.7. Test Results

PASS.

Please refer to the following page.

Injected Currents Susceptibility Test Results

Standard	<input type="checkbox"/> IEC 61000-4-6 <input checked="" type="checkbox"/> EN 61000-4-6		
Applicant	Ningbo Hangzhou Bay New Zone Zhuoao Light Technology Co., Ltd.		
EUT	LED Bulb Light	Temperature	26°C
M/N	ZG120-18W-01	Humidity	51%
Test Mode	ON	Criterion	A
Test Engineer	Jayden Zhuo		

Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Criterion	Result
0.15 ~ 80	AC Mains	3V	A	PASS

Remark:

1. Modulation Signal: 1kHz 80% AM

2. Measurement Equipment:

 Simulator: CIT-10 (FRANKONIA)


 CDN : CDN-M2 (FRANKONIA)

CDN-M3 (FRANKONIA)

Note:

14. MAGNETIC FIELD IMMUNITY TEST

14.1. Block Diagram of Test Setup

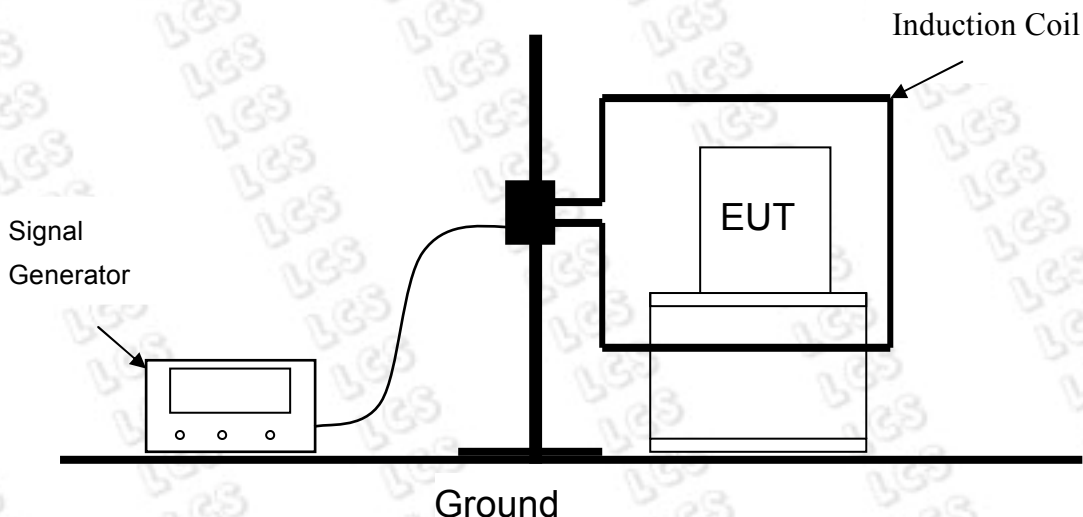

14.2. Test Standard

EN 61547: 2009 (EN 61000-4-8: 2010, Severity Level 2: 3A/m)

14.3. Severity Levels and Performance Criterion

14.3.1. Severity level

Level	Magnetic Field Strength (A/m)
1.	1
2.	3
3.	10
4.	30
5.	100
X	Special

14.3.2. Performance criterion: A

14.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.12.

14.5. Operating Condition of EUT

- 14.5.1. Setup the EUT as shown in Section 14.1.
- 14.5.2. Turn on the power of all equipments.
- 14.5.3. Let the EUT work in test mode (On) and measure it.

14.6. Test Procedure

- 14.6.1. Set up the EUT system as shown on Section 14.1.
- 14.6.2. The Induction coil is set up in horizontal or vertical.
- 14.6.3. Let the EUT work in test mode and measure it.

14.7. Test Results

PASS.

Please refer to the following page.

Magnetic Field Immunity Test Result


Standard	<input type="checkbox"/> IEC 61000-4-8 <input checked="" type="checkbox"/> EN 61000-4-8		
Applicant	Ningbo Hangzhou Bay New Zone Zhuoao Light Technology Co., Ltd.		
EUT	LED Bulb Light	Temperature	26°C
M/N	ZG120-18W-01	Humidity	51%
Test Mode	ON	Criterion	A
Test Engineer	Jayden Zhuo		

Test Level (A/M)	Testing Duration	Coil Orientation	Criterion	Result
3	5 mins	X	A	PASS
3	5 mins	Y	A	PASS
3	5 mins	Z	A	PASS

Note:

15. VOLTAGE DIPS AND INTERRUPTIONS TEST

15.1. Block Diagram of Test Setup

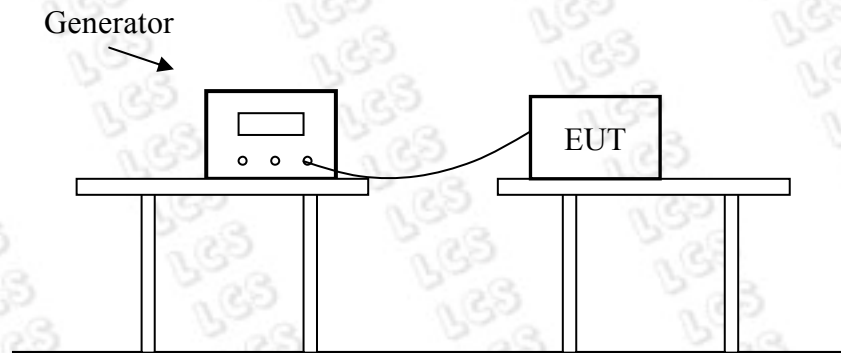

15.2. Test Standard

EN 61547: 2009 (EN 61000-4-11: 2004)

15.3. Severity Levels and Performance Criterion

15.3.1. Severity level

Test Level (%U _T)	Voltage dip and short interruptions (%U _T)	Duration (in period)
0	100	0.5
70	30	10

15.3.2. Performance criterion: **B&C**

15.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.13&3.14.

15.5. Operating Condition of EUT

- 15.5.1. Setup the EUT as shown in Section 15.1.
- 15.5.2. Turn on the power of all equipments.
- 15.5.3. Let the EUT work in test mode (ON) and measure it.

15.6. Test Procedure

- 15.6.1. Set up the EUT and test generator as shown on Section 15.1.
- 15.6.2. The interruptions is introduced at selected phase angles with specified duration.
- 15.6.3. Record any degradation of performance.

15.7. Test Results

PASS.

Please refer to the following page.

Voltage Dips And Interruptions Test Results

Standard	<input type="checkbox"/> IEC 61000-4-11 <input checked="" type="checkbox"/> EN 61000-4-11		
Applicant	Ningbo Hangzhou Bay New Zone Zhuoao Light Technology Co., Ltd.		
EUT	LED Bulb Light	Temperature	26°C
M/N	ZG120-18W-01	Humidity	51%
Test Mode	ON	Criterion	B&C
Test Engineer	Jayden Zhuo		

Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in periods)	Criterion	Result
0	100	0.5P	B	PASS
70	30	10P	C	PASS


Note:

16. PHOTOGRAPH

16.1. Photo of Power Line Conducted Measurement



16.2. Photo of Radiated Electromagnetic Disturbance Measurement

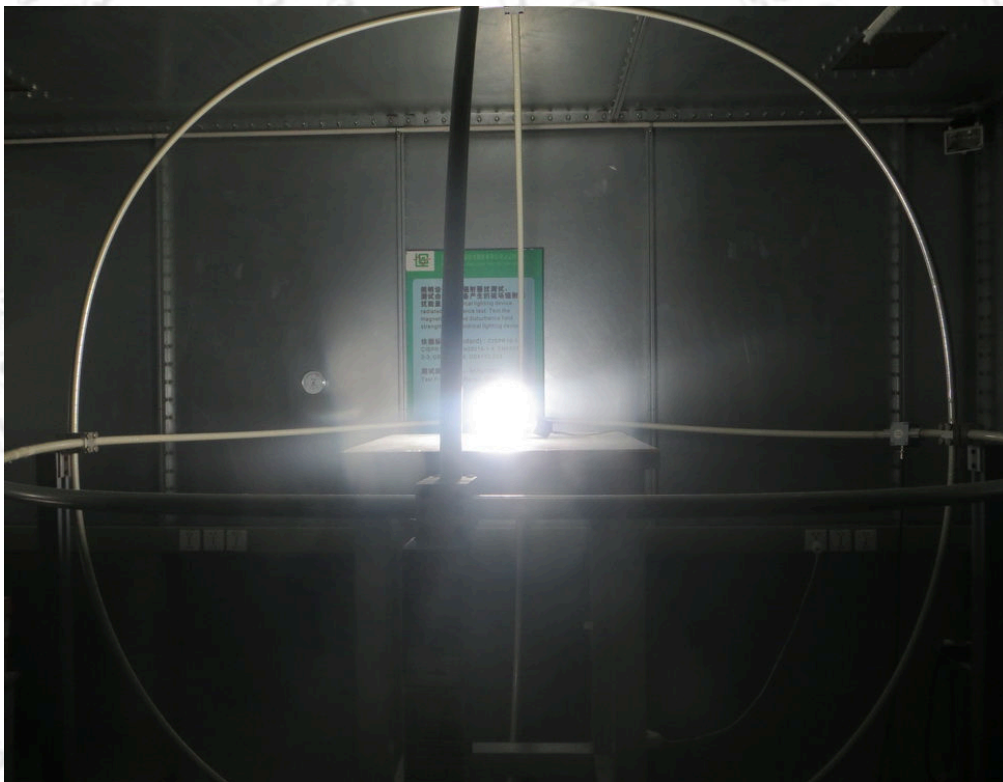


16.3. Photo of Radiated Measurement



16.4. Photo of Harmonic & Flicker Measurement



16.5. Photo of Electrostatic Discharge Test

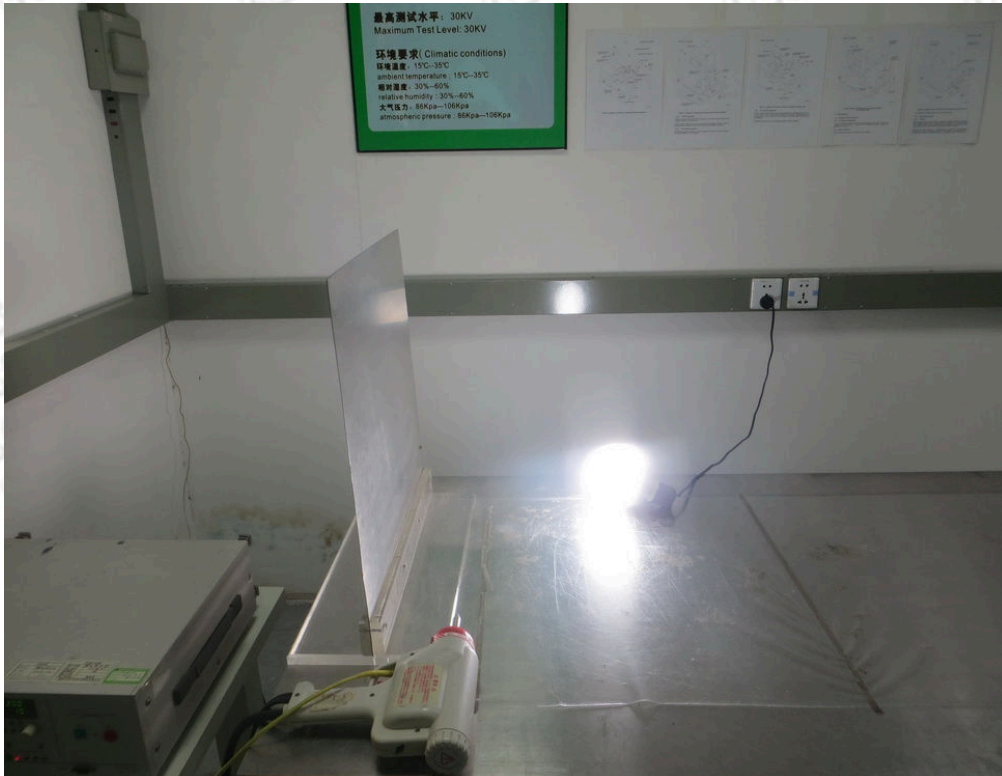


16.6. Photo of Electrical Fast Transient/Burst Test




16.7. Photo of Surge Immunity Test



16.8. Photo of Injected Currents Susceptibility Test

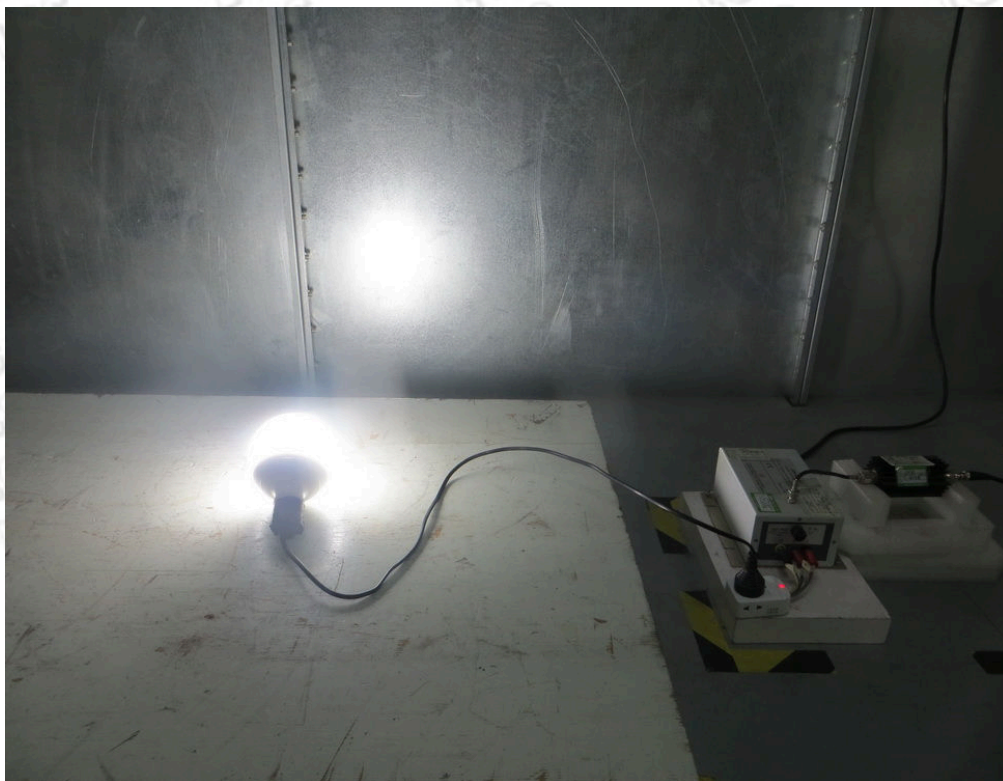

16.9. Photo of Magnetic Field Immunity Test

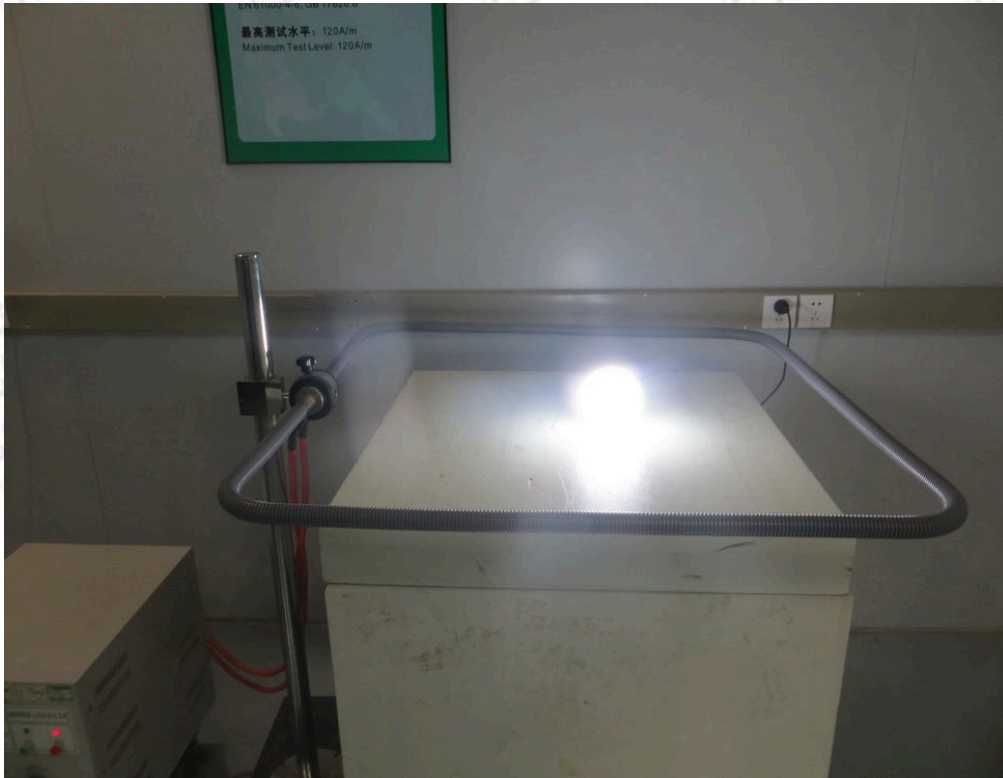

16.10. Photo of Voltage Dips and Short Interruptions Immunity Test



17. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

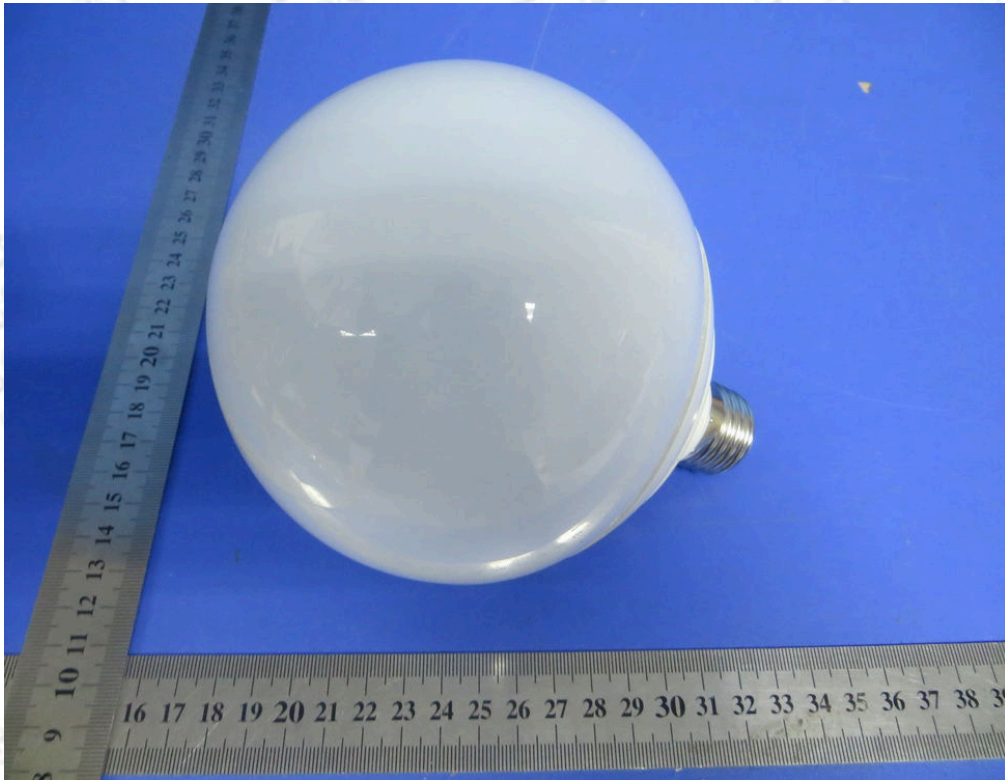


Fig. 1



Fig. 2

Annex1

MODEL LIST					
Product Name	Model Number	Voltage(V)	Frequency(Hz)	Power(W)	Lamp cap
LED Bulb Light	ZG120-18W-01	180-240V~	50-60Hz	18W	E27
LED Bulb Light	ZG120-18W-02	180-240V~	50-60Hz	18W	E27
LED Bulb Light	ZG120-18W-03	180-240V~	50-60Hz	18W	E27
LED Bulb Light	ZG95-12W-01	180-240V~	50-60Hz	12W	E27
LED Bulb Light	ZG95-12W-02	180-240V~	50-60Hz	12W	E27
LED Bulb Light	ZG95-12W-03	180-240V~	50-60Hz	12W	E27
LED Bulb Light	ZG80-12W-01	180-240V~	50-60Hz	12W	E27
LED Bulb Light	ZG80-12W-02	180-240V~	50-60Hz	12W	E27
LED Bulb Light	ZG80-12W-03	180-240V~	50-60Hz	12W	E27
LED Bulb Light	ZG65-9W-01	180-240V~	50-60Hz	9W	E27
LED Bulb Light	ZG65-9W-02	180-240V~	50-60Hz	9W	E27
LED Bulb Light	ZG65-9W-03	180-240V~	50-60Hz	9W	E27
LED Bulb Light	ZG60-7W-01	180-240V~	50-60Hz	7W	E27
LED Bulb Light	ZG60-7W-02	180-240V~	50-60Hz	7W	E27
LED Bulb Light	ZG60-7W-03	180-240V~	50-60Hz	7W	E27
LED Bulb Light	ZG55-5W-01	180-240V~	50-60Hz	5W	E27
LED Bulb Light	ZG55-5W-02	180-240V~	50-60Hz	5W	E27
LED Bulb Light	ZG55-5W-03	180-240V~	50-60Hz	5W	E27
LED Bulb Light	ZG45-4W-01	180-240V~	50-60Hz	4W	E27
LED Bulb Light	ZG45-4W-02	180-240V~	50-60Hz	4W	E27
LED Bulb Light	ZG45-4W-03	180-240V~	50-60Hz	4W	E27
LED Bulb Light	ZG45-4W-04	180-240V~	50-60Hz	4W	E27
LED Bulb Light	ZG45-5W-01	180-240V~	50-60Hz	5W	E27
LED Bulb Light	ZG45-5W-02	180-240V~	50-60Hz	5W	E27
LED Bulb Light	ZP45-4W-01	180-240V~	50-60Hz	4W	E14
LED Bulb Light	ZP45-4W-02	180-240V~	50-60Hz	4W	E14
LED Bulb Light	ZP45-4W-03	180-240V~	50-60Hz	4W	E14
LED Bulb Light	ZP45-4W-04	180-240V~	50-60Hz	4W	E14
LED Bulb Light	ZP45-5W-01	180-240V~	50-60Hz	5W	E14
LED Bulb Light	ZP45-5W-02	180-240V~	50-60Hz	5W	E14
LED Bulb Light	ZC37-5W-01	180-240V~	50-60Hz	5W	E14
LED Bulb Light	ZC37-5W-02	180-240V~	50-60Hz	5W	E14
LED Bulb Light	ZC37-5W-03	180-240V~	50-60Hz	5W	E14
LED Bulb Light	ZC37-5W-04	180-240V~	50-60Hz	5W	E27
LED Bulb Light	ZC37-5W-05	180-240V~	50-60Hz	5W	E27
LED Bulb Light	ZC37-5W-06	180-240V~	50-60Hz	5W	E27
LED Bulb Light	ZF37-5W-01	180-240V~	50-60Hz	5W	E14
LED Bulb Light	ZF37-5W-02	180-240V~	50-60Hz	5W	E14
LED Bulb Light	ZF37-5W-03	180-240V~	50-60Hz	5W	E14
LED Bulb Light	ZF37-5W-04	180-240V~	50-60Hz	5W	E27
LED Bulb Light	ZF37-5W-05	180-240V~	50-60Hz	5W	E27
LED Bulb Light	ZF37-5W-06	180-240V~	50-60Hz	5W	E27
LED Bulb Light	ZR80-9W-01	180-240V~	50-60Hz	9W	E27
LED Bulb Light	ZR80-9W-02	180-240V~	50-60Hz	9W	E27
LED Bulb Light	ZR80-9W-03	180-240V~	50-60Hz	9W	E27
LED Bulb Light	ZR63-7W-01	180-240V~	50-60Hz	7W	E27
LED Bulb Light	ZR63-7W-02	180-240V~	50-60Hz	7W	E27
LED Bulb Light	ZR63-7W-03	180-240V~	50-60Hz	7W	E27
LED Bulb Light	ZR50-5W-01	180-240V~	50-60Hz	5W	E14
LED Bulb Light	ZR50-5W-02	180-240V~	50-60Hz	5W	E14

LED Bulb Light	ZR50-5W-03	180-240V~	50-60Hz	5W	E14
LED Bulb Light	ZR39-3W-01	180-240V~	50-60Hz	3W	E14
LED Bulb Light	ZR39-3W-02	180-240V~	50-60Hz	3W	E14
LED Bulb Light	ZR39-3W-03	180-240V~	50-60Hz	3W	E14
LED Bulb Light	ZA60-12W-01	180-240V~	50-60Hz	12W	E27
LED Bulb Light	ZA60-12W-02	180-240V~	50-60Hz	12W	E27
LED Bulb Light	ZA60-12W-03	180-240V~	50-60Hz	12W	E27
LED Bulb Light	ZA60-12W-04	180-240V~	50-60Hz	12W	E27
LED Bulb Light	ZA60-11W-01	180-240V~	50-60Hz	11W	E27
LED Bulb Light	ZA60-11W-02	180-240V~	50-60Hz	11W	E27
LED Bulb Light	ZA60-11W-03	180-240V~	50-60Hz	11W	E27
LED Bulb Light	ZA60-10W-01	180-240V~	50-60Hz	10W	E27
LED Bulb Light	ZA60-10W-02	180-240V~	50-60Hz	10W	E27
LED Bulb Light	ZA60-10W-03	180-240V~	50-60Hz	10W	E27
LED Bulb Light	ZA60-9W-01	180-240V~	50-60Hz	9W	E27
LED Bulb Light	ZA60-9W-02	180-240V~	50-60Hz	9W	E27
LED Bulb Light	ZA60-9W-03	180-240V~	50-60Hz	9W	E27
LED Bulb Light	ZA60-9W-04	180-240V~	50-60Hz	9W	E27
LED Bulb Light	ZA60-9W-05	180-240V~	50-60Hz	9W	E27
LED Bulb Light	ZA60-7W-01	180-240V~	50-60Hz	7W	E27
LED Bulb Light	ZA60-7W-02	180-240V~	50-60Hz	7W	E27
LED Bulb Light	ZA60-7W-03	180-240V~	50-60Hz	7W	E27
LED Bulb Light	ZA60-7W-04	180-240V~	50-60Hz	7W	E27
LED Bulb Light	ZA60-7W-05	180-240V~	50-60Hz	7W	E27
LED Bulb Light	ZA50-5W-01	180-240V~	50-60Hz	5W	E27
LED Bulb Light	ZA50-5W-02	180-240V~	50-60Hz	5W	E27
LED Bulb Light	ZA50-5W-03	180-240V~	50-60Hz	5W	E27
LED Bulb Light	ZA50-3W-01	180-240V~	50-60Hz	3W	E27
LED Bulb Light	ZA50-3W-02	180-240V~	50-60Hz	3W	E27
LED Bulb Light	ZA50-3W-03	180-240V~	50-60Hz	3W	E27
LED Bulb Light	ZA70-12W-01	180-240V~	50-60Hz	12W	E27
LED Bulb Light	ZA70-12W-02	180-240V~	50-60Hz	12W	E27
LED Bulb Light	ZA70-12W-03	180-240V~	50-60Hz	12W	E27
LED Bulb Light	A00101	180-240V~	50-60Hz	9W	E27
LED Bulb Light	B01009	180-240V~	50-60Hz	9W	E27
LED Bulb Light	B04012	180-240V~	50-60Hz	12W	E27
LED Bulb Light	A00301	180-240V~	50-60Hz	5W	E14
LED Bulb Light	A00203	180-240V~	50-60Hz	4W	E14
LED Bulb Light	A00211	180-240V~	50-60Hz	7W	E27
LED Bulb Light	B04012-D	180-240V~	50-60Hz	12W	E27
LED Bulb Light	A00301-D	180-240V~	50-60Hz	5W	E14

-----THE END OF REPORT-----