


mW/PACKAGE	NO. OF PINS			
	5	6	7	8
	500	625	750	875

mW/PACKAGE	NO. OF PINS			
	9	10	11	12
	1000	1050	1150	1250


DIMENSION: mm

Pin One Indicated

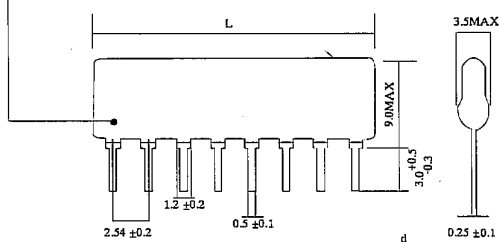

	RESISTOR	CAPACITOR
MAX. OPERATING VOLTAGE	50V	
RANGE	22Ω ~ 1MΩ	10pF-0.1μF
T.C.R.	± 100ppm/°C. ± 200ppm/°C.	NPO, X7R, Z5U
TOLERANCE	± 1% (F), ± 2% (G) ± 5% (J)	± 5%, ± 10%, ± 20%, + 80% - 20%
OPERATING TEMP. RANGE	- 25°C ~ + 85°C	
STORAGE TEMP RANGE	- 55°C ~ + 125°C	

CIRCUITS CONSTRUCTION

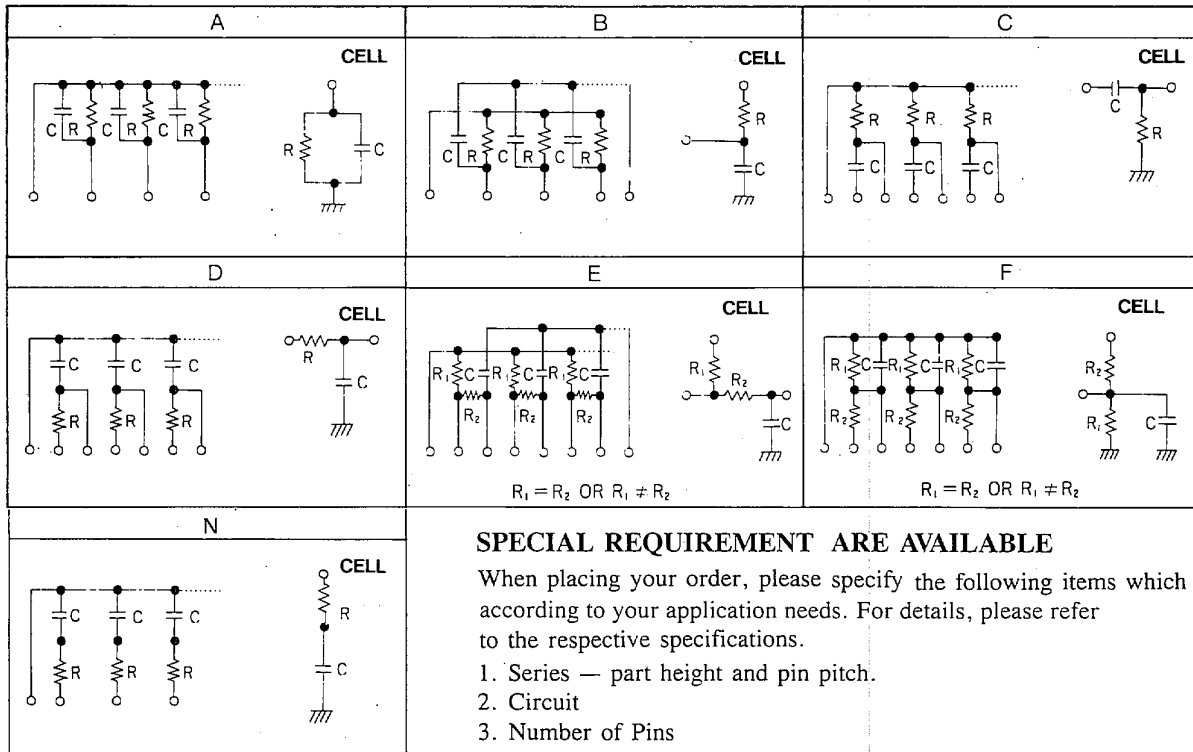

SPECIAL REQUIREMENT ARE AVAILABLE

When placing your order, please specify the following items which according to your application needs. For details, please refer to the respective specifications.

1. Series — part height and pin pitch.
2. Circuit
3. Number of Pins
4. TC, Tol. Capacitance for Capacitor
5. Resistance, Wattage, Tol. for Resistor