

SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 150 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 20mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC.
5. 1000V D.C. or A.C. PEAK; ONE CONTACT TO ALL OTHER CONTACTS CONNECTED TOGETHER. 1500V D.C. OR A.C. PEAK; ALL CONTACTS CONNECTED TOGETHER TO SHIELD, (HOUSING/MOUNTING PLATE) IF PRESENT. @ 0.5mA 50 Hz OR 60 Hz A MINUTE

MECHANICAL:

1. RETENTION STRENGTH: 50N MIN. FOR 60S±5S
2. OPERATING LIFE: 750 CYCLES.
3. INSERTION FORCE: 30N MAX.

ENVIRONMENTAL:

1. OPERATION: -25℃~+55℃ GB 10753-89
2. STORAGE: -10℃~+40℃ RELATIVE HUMIDITY<80%, GB 10753-89
3. STORAGE TIME: 12 MONTHS
4. SALT SPRAY TEST: SEE TABLE



CHARACTERISTICS:

PLUG WILL ACCEPT 24 OR 26 AWG STRANDED WIRE HAVING A MAXIMUM INSULATION DIAMETER OF 0.89-0.99 MM AND A MAXIMUM DIAMETER CABLE JACKET OF 5.40 MM

备注:

1. 电气特性
 - 1.1 额定电压: 150 VAC RMS
 - 1.2 额定电流: 1.5 AMP
 - 1.3 接触电阻: 最大20毫欧
 - 1.4 绝缘电阻: 最小1000兆欧@500V DC
 - 1.5 耐压
 - 端子与其余端子: 1000V DC/AC PEAK @0.5mA 50 OR 60Hz 1Minute
 - 全部端子与包壳: 1500V DC/AC PEAK @0.5mA 50 OR 60Hz 1Minute
2. 机械性能
 - 2.1 配合强度: 50N FOR 60S±5S
 - 2.2 使用寿命: 750次
 - 2.3 插拔力: 30N MAX.
3. 环境性能
 - 3.1 工作环境温度: -25℃~+55℃
 - 3.2 储运环境温度: -10℃~+40℃ 相对湿度<80%
 - 3.3 储存时间: 12个月
4. 机构特性
 - 4.1 本款水晶头适用于 24~26 AWG 多股线, 多股线绝缘直径 0.89~0.99MM, 外层护套最大直径5.4MM

SALT SPRAY		
G/F	NA	
3u 6u	24H	
15u 30u	48H	
50u		

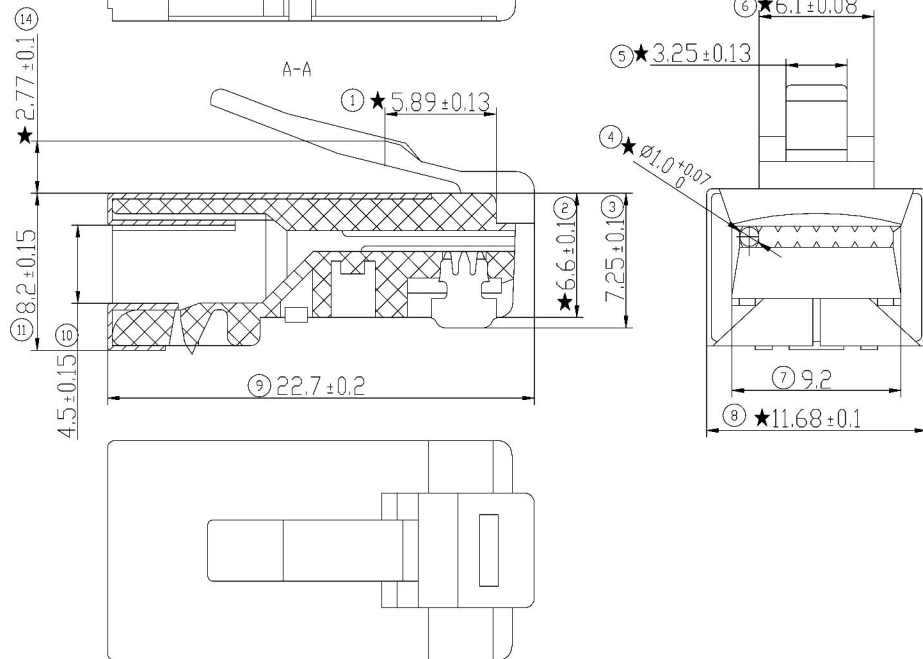

REV. 版本	ECN NO. 变更单号	DESCRIPTION 变更说明	DATE 日期
01			2018.05.24