DIMENSIONS ARE IN MILLIMETERS

0.5-5 = +/- 0.2

5-30 = +/- 0.4

30-120 = +/- 0.6

120-315 = +/- 1

315-1000 = +/- 1.6

1000-2000 = +/- 2.4

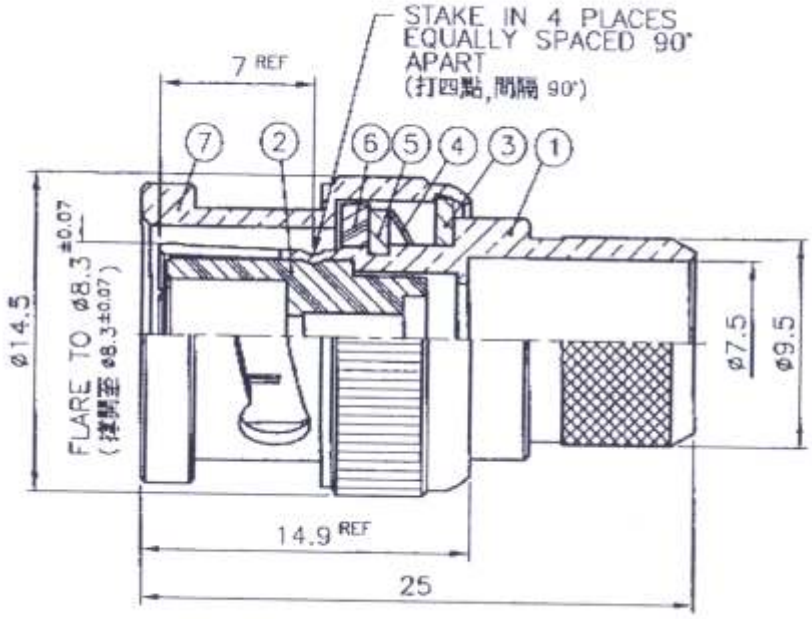

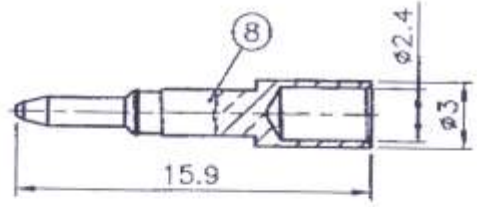

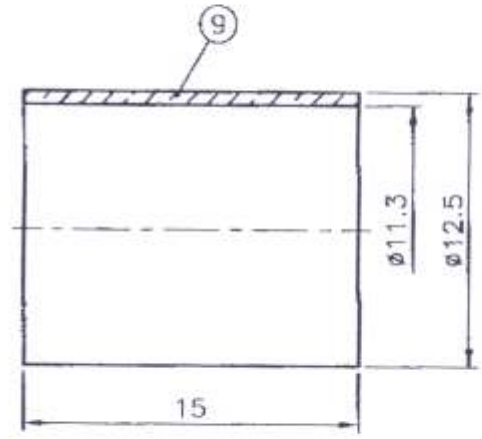

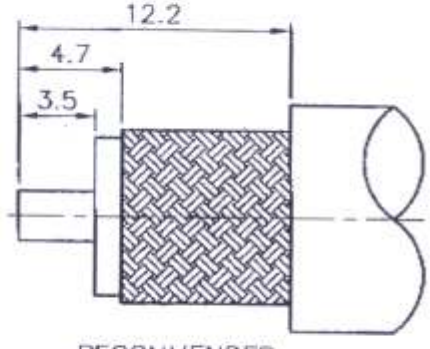

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD FLUSH OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. ZINC DIECAST
5. BRASS JIS H 3250, C 2700

No.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO
9	FERRULE	NOTE 5	NOTE 2	1	C06-035N
8	CONTACT PIN	NOTE 1	NOTE 3	1	C01-001RGF03
7	SHELL	NOTE 4	NOTE 2	1	H7001-ZNDGE01
6	GASKET	RUBBER	RED		
5	C RING	SS41	NOTE 2		
4	SPRING	SK5	NOTE 2		
3	WASHER	SS41	NOTE 2		
2	INSULATOR	DELRIN	WHITE		
1	BODY	NOTE 1	NOTE 2		

RoHS COMPLIANT

APPROVED BY :

Date JUL 06 2006

UNITED AU-VI CO., LTD.

Description: BNC MALE CRIMP RG213/U

Part No.: V-7001E-D

File No.: R7001-ZNDGE01

ULTIMAX®
THE ULTIMATE ELECTRONIC COMPONENTS