
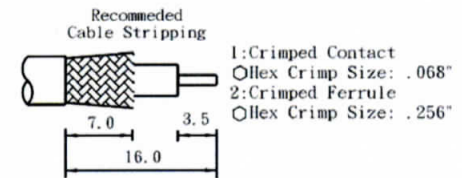


0.5-5 = +/- 0.2
 5-30 = +/- 0.4
 30-120 = +/- 0.6
 120-315 = +/- 1
 315-1000 = +/- 1.6
 1000-2000 = +/- 2.4

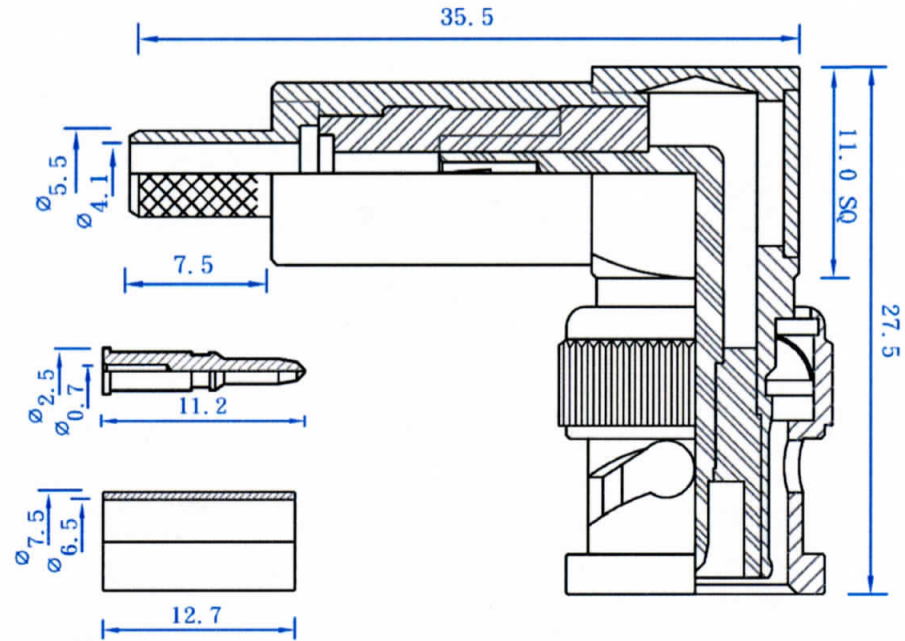

Impedance	50 Ω
Frequency Range	0 to 4 GHz
Voltage Rating	500 volts peak
Dielectric Withstanding Voltage	1500 volts rms
VSWR	M39012 straight connectors: 1.3 max. 0-4GHz M39012 right angle: 1.3 max. 0-4GHz
Other (MIL-C-39012 Cable Connectors)	Contact resistance: center contact 1.5 milliohm outer contact 0.2 milliohm Insertion loss: 0.2db max at 3.0GHz Insulation resistance: 5000 mΩ (min)

NOTE: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER JIS-H3250C3604(ASTM-B16)
2. CONNECTOR INTERFACE PER MIL-STD-348A
3. PART TO BE CLEAN AND FREE BURRS
4. NICKEL PL 70 μ" THICK PLATING
5. GOLD PL 1-3 μ" OVER NICKEL PL 70 μ" THICK PLATING

RoHS COMPLIANT

APPROVED BY



UNITED AU-VI CO., LTD.

Description:

BNC MALE CRIMP RIGHT ANGLE RG59/U

Part No.:

V-7005B-D/JD



Date: MAY 20 2016

File No.: B-010-59

NO	DESCRIPTION	Q'TY	MATERIAL	FINISH
5	SHELL		BRASS	NICKEL
4	FERRULE		BRASS	NICKEL
3	INSULATOR		DELTRIN	WHITE
2	CONTACT		BRASS	GOLD
1	BODY		BRASS	NICKEL