



DIMENSIONS ARE IN MILLIMETERS



0.5-5 = +/- 0.2
 5-30 = +/- 0.4
 30-120 = +/- 0.6
 120-315 = +/- 1
 315-1000 = +/- 1.6
 1000-2000 = +/- 2.4

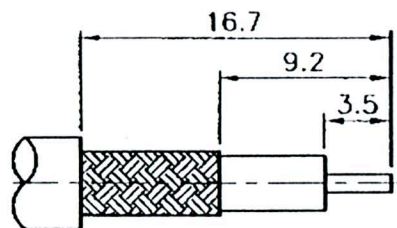

RECOMMENDED
 CABLE STRIPPING DIM'S
 (建議剝線尺寸)

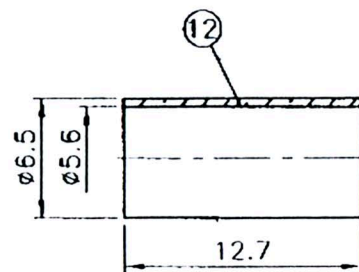

STAKE IN 3 PLACES
 EQUALLY SPACED 120°
 APART
 (打三點, 間隔 120°)

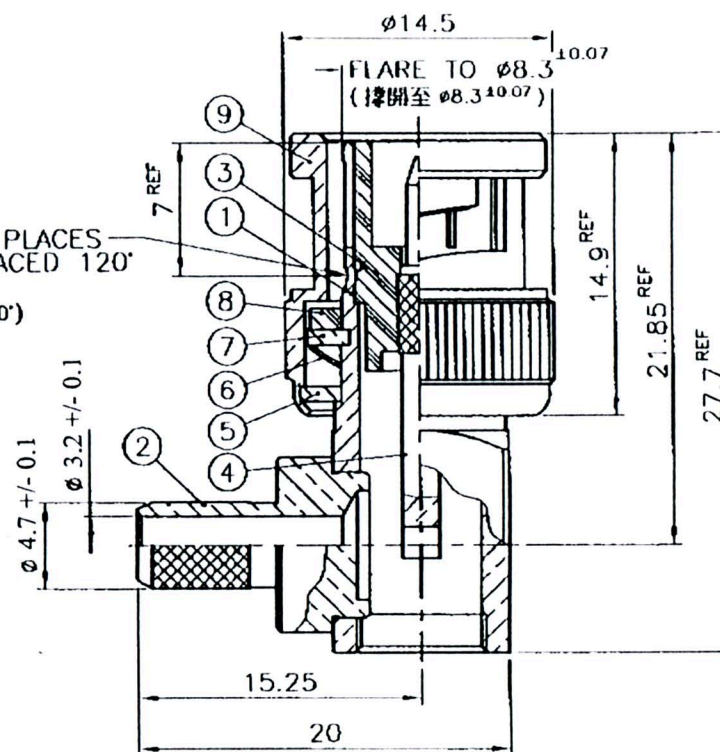

1. CRIMPED FERRULE
 HEX CRIMP SIZE .213"
 (套管壓著工具)
 2. CONTACT PIN TO SOLDER
 (中心針銲接)

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL FLUSH OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. BRASS JIS H 3250, C 2700

12	FERRULE	1	NOTE5	NOTE2
11	NUT	1	NOTE1	NOTE2
10	INSULATOR	1	P.P	NATURAL
9	SHELL	1	NOTE1	NOTE2
8	GASKET	1	RUBBER	RED
7	C RING	1	SS41	NOTE2
6	SPRING	1	SK5	NOTE2
5	WASHER	1	SS41	NOTE2
4	PIN	1	NOTE1	NOTE3
3	INSULATOR	1	NOTE4	WHITE
2	BRAID HOLDER	1	NOTE1	NOTE2
1	BODY	1	NOTE1	NOTE2
No.	DESCRIPTION	Qty	MATERIAL	FINISH

APPROVED BY :



Date SEP. 29 2005

UNITED AU-VI CO., LTD.

Description: BNC MALE RIGHT ANGLE CRIMP TYPE
 RG58/U - TEFLON

Part No.: V-7005SA-T

ULTIMAX®
 THE ULTIMATE ELECTRONIC COMPONENTS

File No.: 7005-BNTGA18