



DIMENSIONS ARE IN MILLIMETERS

- 0.5-5 = +/- 0.2
- 5-30 = +/- 0.4
- 30-120 = +/- 0.6
- 120-315 = +/- 1
- 315-1000 = +/- 1.6
- 1000-2000 = +/- 2.4

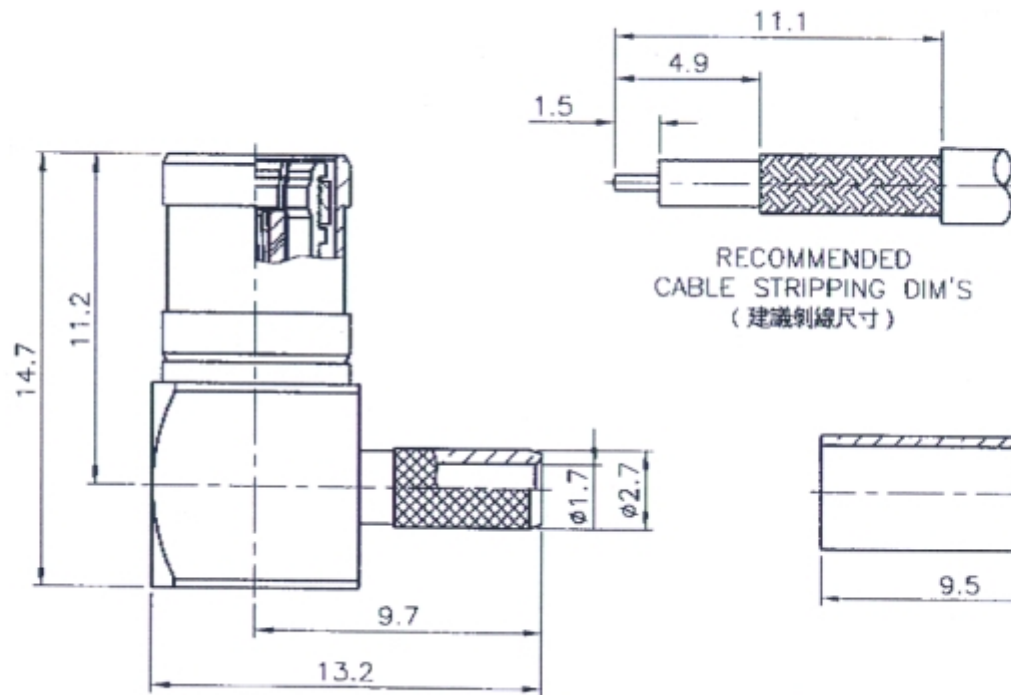

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. BERYLLIUM COPPER PER QQ-C-530
6. BRASS JIS H 3250, C 2700



1. CRIMPED FERRULE  
HEX CRIMP SIZE .128" (3.25mm)  
(套管壓著工具)
2. CONTACT PIN TO SOLDER  
(中心針銲接)

RoHS COMPLIANT

9	NUT	NOTE 1	NOTE 2
8	SPACER	NOTE 4	WHITE
7	FERRULE	NOTE 6	NOTE 2
6	SHELL	NOTE 1	NOTE 2
5	C RING	NOTE 5	NONE
4	BRAID HOLDER	NOTE 1	NOTE 2
3	CONTACT PIN	NOTE 5	NOTE 3
2	INSULATOR	NOTE 4	WHITE
1	BODY	NOTE 1	NOTE 2

APPROVED BY:



UNITED AU-VI CO., LTD.

Description: SMB MALE CRIMP RIGHT ANGLE RG174/U - GOLD PLATED

Part No.: V-9103DG

**ULTIMAX**<sup>®</sup>  
THE ULTIMATE ELECTRONIC COMPONENTS

NO. DESCRIPTION MATERIAL FINISH Q'TY Date: JUN. 21 2007 File No.: 9111NR509BF002B