


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

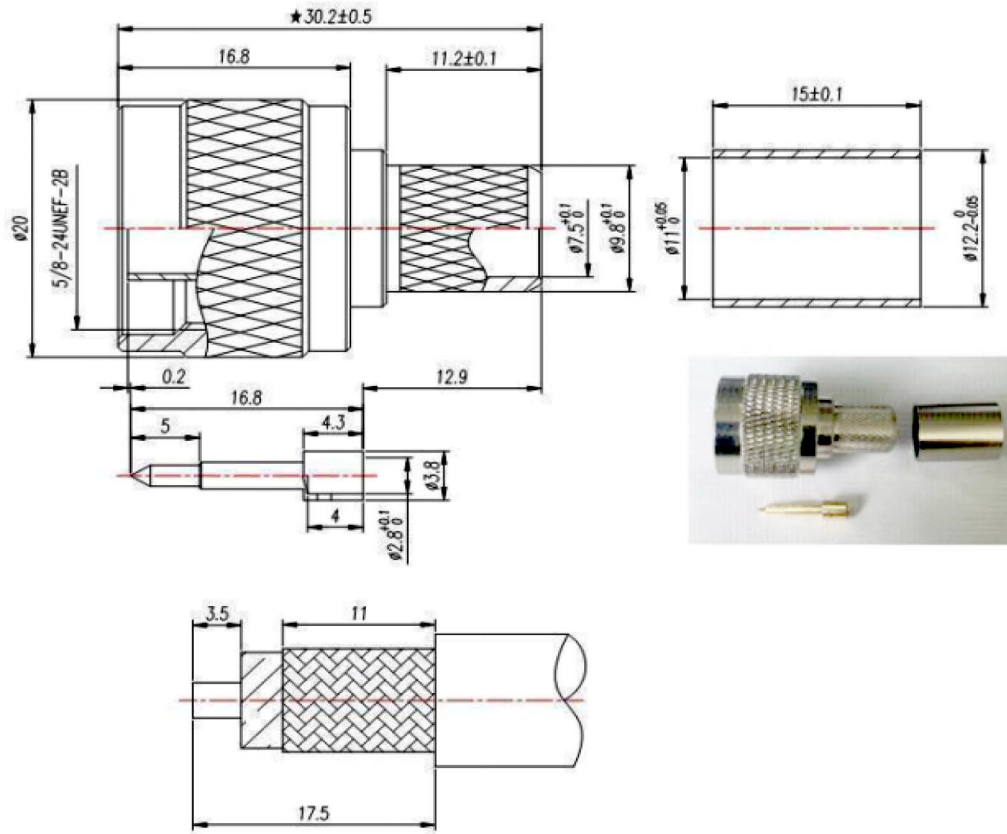

- 1 Electrical
  - 1.1 Impedance 50 Ω
  - 1.2 Frequency DC~6GHz
  - 1.3 VSWR ≤1.2
- 2 Environmental&Mechanical
  - 2.1 Temperature range -40℃~125℃
  - 2.2 RoHs Compliant
  - 2.3 Durability >500 cycles
- 3 Materials&plating
  - 3.1 Body: Brass with Nickel
  - 3.2 Insulator: Teflon
  - 3.3 Contact Pin: Brass, Gold plated
  - 3.4 Pipe: Brass with nickel

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 15/02/08 ENGINEER: C. Tao 15/02/08 APPROVED: W. Qiang 15/02/08 TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	TITLE: RF Coaxial Connector  <b>N MALE CRIMP LMR400</b>	DIMENSION IN MILLIMETERS (mm)
PART NO: <b>JY120306</b>	SIZE: A4 SCALE: N/A SHEET: 1/1 REV: A	