


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

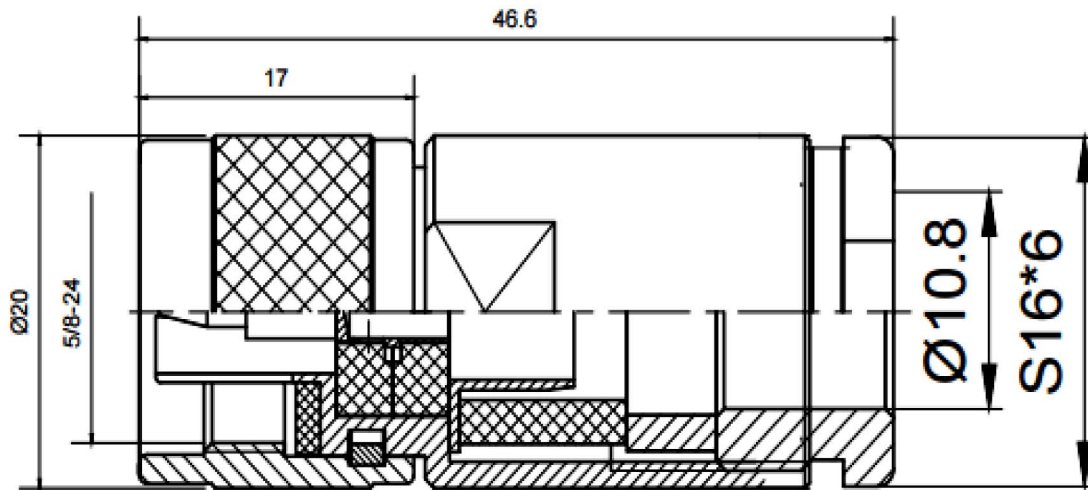

1 Electrical

- 1.1 Impedance 50 Ω
- 1.2 Frequency DC~6GHz
- 1.3 VSWR ≤1.2

2 Environmental&Mechanical

- 2.1 Temperature range -40℃~125℃
- 2.2 RoHs Compliant
- 2.3 Durability >500 cycles

3 Materials&plating

- 3.1 Body: Brass with Nickel
- 3.2 Insulator: Teflon
- 3.3 Contact Pin: Brass, Gold plated

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 15/02/08 ENGINEER: C. Tao 15/02/08 APPROVED: W. Qiang 15/02/08 TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	TITLE: RF Coaxial Connector  <b>N MALE CLAMP LMR400</b>	 DIMENSION IN MILLIMETERS (mm)
PART NO:	<b>JY120307</b>	SIZE: A4 SCALE: N/A SHEET: 1/1 REV: A