
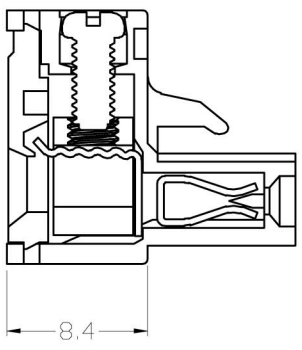
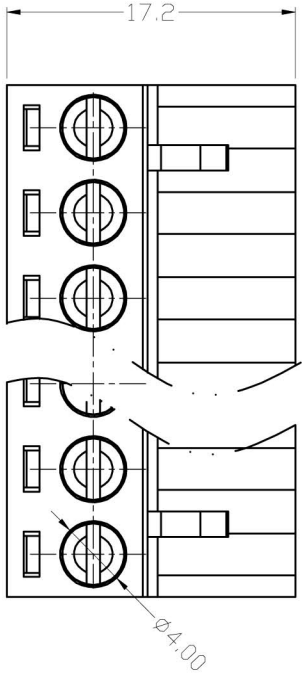



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED

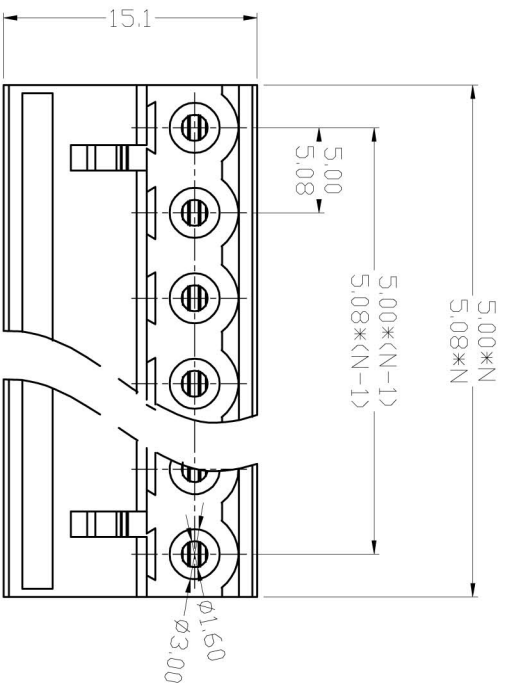

.MATERIAL
 CONTACT : PHOSPHOR BRONZE
 SCREWS : M2.5 STEEL,ZINC PLATED
 HOUSING : PA66, UL94V-0

.ELECTRICAL
 RATED VOLTAGE : 300V
 RATED CURRENT : 12A
 CONTACT RESISTANCE : 20mΩ
 INSULATION RESISTANCE : 5000MΩ/1000V
 WITHSTANDING VOLTAGE : AC1500V/1mm
 WIRE RANGE : 28-12AWG 2.5mm²

.MECHANICAL
 TEMP RANGE : -40℃~+105℃
 MAX SOLDERING : +250℃, FOR 5 SEC.
 ORODE : 0.5Nm(4.5lB.IN)
 STRUO LEBGTG : 7.8mm

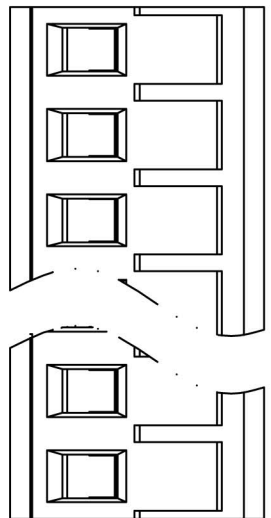

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ±0.20	X, ±2°
.X, ±0.15	X, ±1°
.XX, ±0.10	.XX, ±0.5°

DRAWING TYPE	COMPONENTS
SCALE	1:1
DRAWING NO.	SHEET 1 OF 1

PROJECTION	TITLE
UNITS	PLUGGABLE TERMINAL BLOCKS
SHEET SIZE	PITCHS.00/5.08mm
A4	
SERIES	KF2EDG