



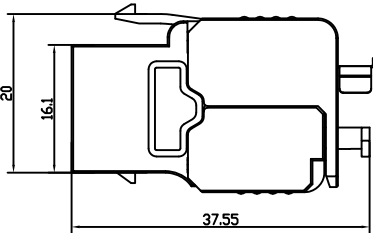









enclosure



COVER



color code

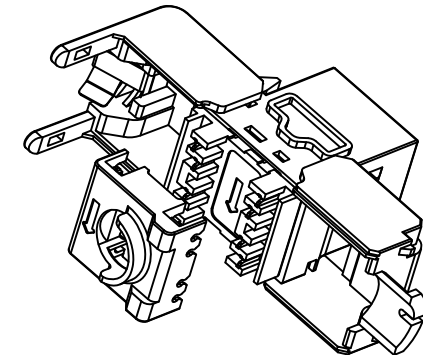

Specification:

Material:

- 1. JACK Housing :Zinc alloy
- 2. RJ45 contact material & finished:
  - 2-1.Phosphor Bronze with Nickel plated.
  - 2-2.Contact area :Gold plated.

3.IDC Housing: PC

4.IDC Terminal material & finished:

- 4-1.Phosphor Bronze with Tin plated.
- 4-2. Toolless compatible.
- 4-3. Suitable for 22-26 AWG stranded and solid wire.

Performance:

- a.The sticker color codes combine two wirings of T568A & T568B.
- b.Insertion Force: 900 gms for 8 contacts.
- c.Retention Strength: 7.7 kgs between Jack and Plug.
- d.Operation Temperature: -20° to 68°.

e.Durability:

- e-1. Jack : 750 cycles Plug-Jack mating and unmating test, Insertion cycles at 20 cycles/minute max. Contact resistance test per 100 cycles.
- e-2. IDC : Max. 200 punching times.

f.The Cat.6A performance is in compliance with the ANSI/TIA/EIA 568 C standard.

			Tolerance: X. ±0.5 .X ±0.3 .XX ±0.10	SCALE: FREE	CUSTOMER:			Approved by
			Angle: X° ±3° .X° ±1°	UNIT: mm	CUSTOMER P/N:		COMPANY P/N: 01.075.0114	Checked by
REV.	DESCRIPTION	DATE	REV. : 00		DWG. No. :		TITLE: FTP CAT6A KEYSTONE JACK TOOLLESS	Design by <b>XJH</b>